


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.67 lm/W			
MODEL	62001000701.20W.4K	I _{max} (cd)	1695	S/MH(C0/180)	0.96
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.02
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2672.8	η UP,DN(C0-180)	0.3,50.2
NOMINAL FLUX(lm)	2672.84	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,49.2
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	230	η down (%)	99.4	CIBSE SHR MAX	1.10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

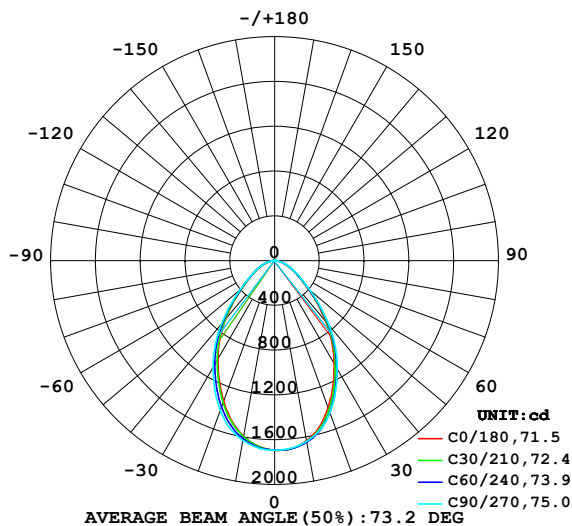

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

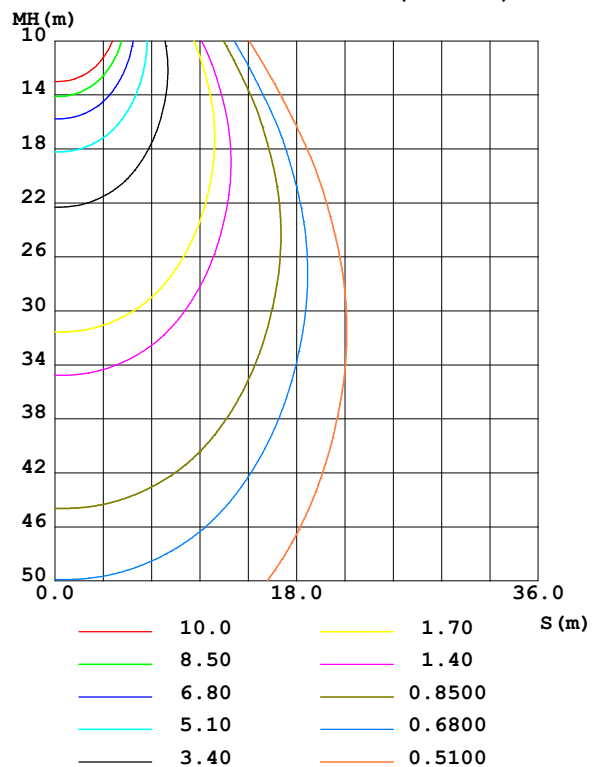

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity: 65.0%
Test Distance: 12.177m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1635	1645	1641	1612	1593	1607	1631	1635	0- 10	158.5	158.5	5.93,5.93
20	1398	1430	1446	1385	1336	1370	1424	1415	10- 20	429.2	587.7	22,22
30	1065	1098	1118	1059	1014	1050	1100	1080	20- 30	568.7	1156	43.3,43.3
40	713.4	739.2	761.4	716.8	681.4	704.8	738.6	721.7	30- 40	562.2	1719	64.3,64.3
50	386.8	397.9	412.5	392.7	374.3	382.7	399.2	390.0	40- 50	421.1	2140	80.1,80.1
60	212.1	215.6	224.1	216.5	210.2	213.5	219.6	212.8	50- 60	260.9	2401	89.8,89.8
70	112.8	114.7	120.2	116.6	113.8	115.7	118.4	113.1	60- 70	160.1	2561	95.8,95.8
80	37.25	38.90	40.90	40.02	38.24	39.08	39.34	37.28	70- 80	79.62	2640	98.8,98.8
90	2.385	1.147	1.578	1.101	0.6557	1.222	0.9459	1.197	80- 90	16.72	2657	99.4,99.4
100	0.5467	0.6923	0.7059	0.6886	0.8656	0.8550	0.7391	0.7967	90-100	0.8933	2658	99.4,99.4
110	0.9220	1.041	1.207	1.138	1.321	1.326	1.285	1.212	100-110	0.9844	2659	99.5,99.5
120	1.526	1.690	1.935	1.821	2.050	2.105	2.114	1.963	110-120	1.500	2660	99.5,99.5
130	2.403	2.600	2.878	2.736	3.019	3.100	3.115	2.931	120-130	2.106	2662	99.6,99.6
140	3.483	3.659	3.936	3.806	4.111	4.160	4.140	3.994	130-140	2.605	2665	99.7,99.7
150	4.543	4.717	4.938	4.870	5.204	5.241	5.186	5.075	140-150	2.773	2668	99.8,99.8
160	5.681	5.787	5.939	5.923	6.274	6.247	6.175	6.122	150-160	2.532	2670	99.9,99.9
170	6.729	6.703	6.814	6.805	7.099	6.976	6.881	6.930	160-170	1.821	2672	100,100
180	7.162	7.090	7.030	7.038	7.219	7.101	7.053	7.067	170-180	0.6668	2673	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1952 lm

%lum = 73.0%

%lamp = 73.0%

Conical surface Flux(130deg): 2491.1 lm

%lum = 93.2%


%lamp = 93.2%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

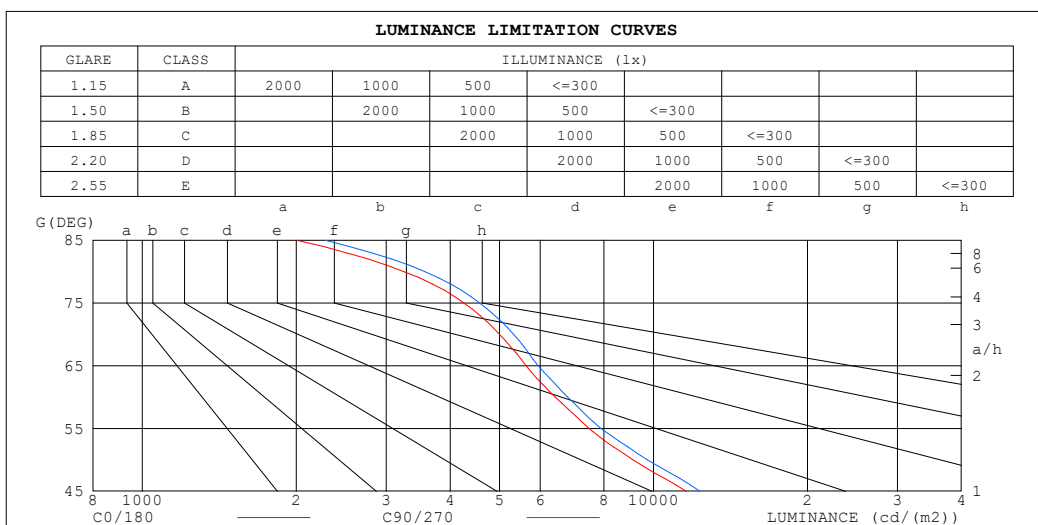

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2005	2282
80	3248	3570
75	4261	4571
70	4996	5325
65	5635	5952
60	6423	6794
55	7479	7895
50	9112	9727
45	11583	12323


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99														
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88														
2.0	.96	.91	.86	.94	.89	.85	.91	.87	.83	.88	.84	.81	.85	.82	.79	.77														
3.0	.87	.80	.75	.85	.79	.74	.82	.77	.73	.80	.75	.72	.77	.74	.70	.68														
4.0	.79	.72	.66	.78	.71	.65	.75	.69	.65	.73	.68	.64	.71	.66	.63	.61														
5.0	.72	.64	.59	.71	.64	.58	.69	.63	.58	.67	.61	.57	.65	.60	.56	.55														
6.0	.66	.58	.53	.65	.58	.52	.63	.57	.52	.62	.56	.52	.60	.55	.51	.49														
7.0	.61	.53	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.56	.51	.47	.45														
8.0	.56	.49	.44	.55	.48	.43	.54	.48	.43	.53	.47	.43	.52	.47	.43	.41														
9.0	.52	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.39	.48	.43	.39	.38														
10.0	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.45	.40	.36	.35														

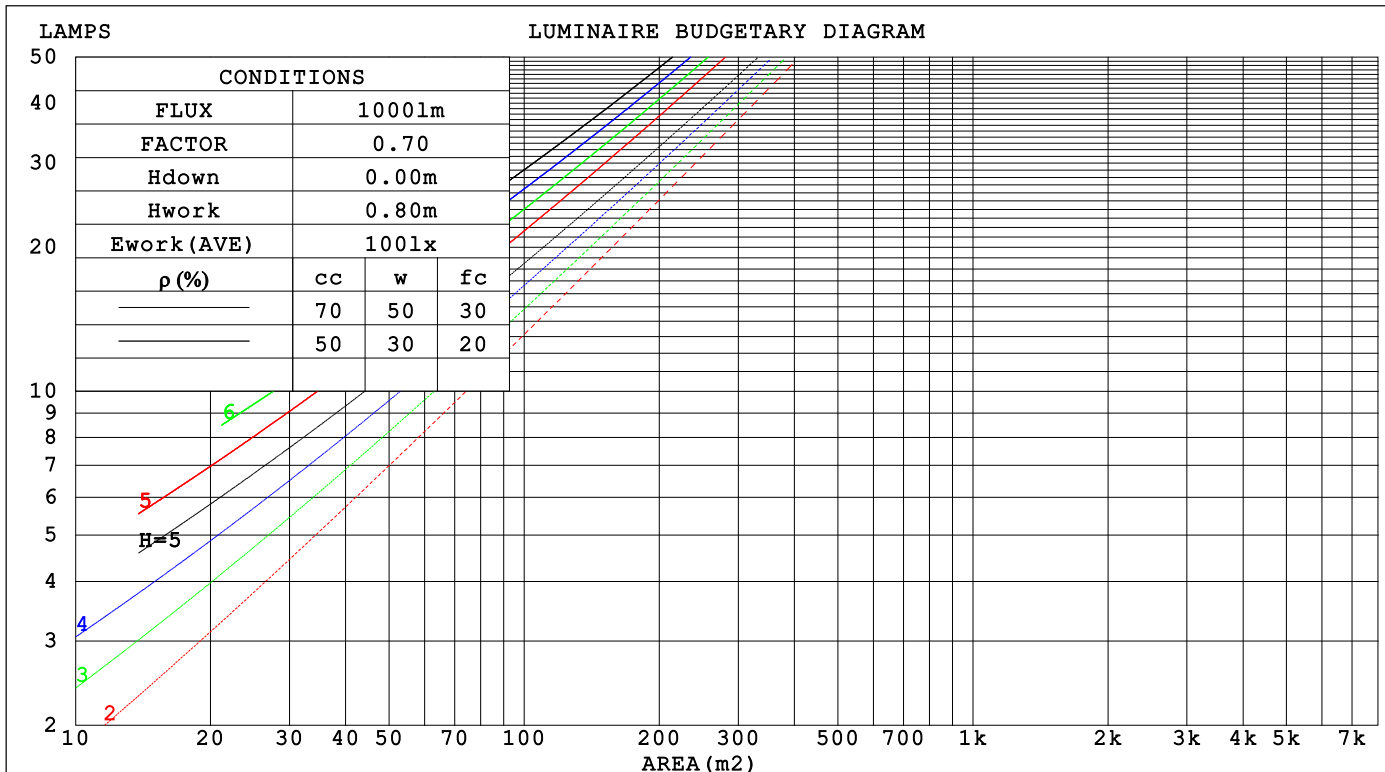

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K			TYPE: 62001000701.20W.4K			WEIGHT:		
SPEC.: 62001000701.20W.4K			DIM.: 1175*65*42mm			SERIAL No.:		
MFR.:			SUR.: 1169*57mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.244	.139	.044	.237	.135	.043	.223	.128	.041	.211	.122	.039	.200	.116	.037		
2.0	.234	.128	.039	.228	.125	.039	.216	.120	.037	.206	.115	.036	.196	.111	.035		
3.0	.221	.117	.035	.215	.115	.035	.205	.111	.034	.196	.107	.033	.187	.104	.032		
4.0	.207	.108	.032	.202	.106	.031	.193	.103	.031	.185	.100	.030	.178	.097	.029		
5.0	.194	.099	.029	.190	.098	.028	.182	.095	.028	.175	.092	.027	.168	.090	.027		
6.0	.183	.092	.026	.179	.090	.026	.172	.088	.026	.166	.086	.025	.159	.084	.025		
7.0	.172	.085	.024	.169	.084	.024	.163	.082	.024	.157	.080	.023	.151	.079	.023		
8.0	.162	.079	.022	.160	.079	.022	.154	.077	.022	.149	.075	.022	.144	.074	.021		
9.0	.154	.074	.021	.151	.074	.021	.146	.072	.020	.141	.071	.020	.137	.070	.020		
10.0	.146	.070	.019	.143	.069	.019	.139	.068	.019	.135	.067	.019	.130	.066	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021		
1.0	.180	.161	.144	.154	.138	.124	.106	.095	.086	.061	.055	.050	.019	.018	.016		
2.0	.169	.137	.110	.145	.118	.095	.099	.081	.066	.057	.047	.039	.018	.015	.013		
3.0	.160	.119	.086	.137	.102	.074	.094	.071	.052	.054	.042	.031	.017	.013	.010		
4.0	.151	.105	.069	.130	.090	.060	.089	.063	.042	.052	.037	.025	.017	.012	.008		
5.0	.143	.094	.057	.123	.081	.050	.085	.057	.035	.049	.033	.021	.016	.011	.007		
6.0	.136	.085	.048	.117	.074	.042	.081	.052	.030	.047	.030	.018	.015	.010	.006		
7.0	.130	.078	.042	.112	.068	.036	.077	.047	.026	.045	.028	.015	.015	.009	.005		
8.0	.124	.072	.036	.107	.063	.032	.074	.044	.022	.043	.026	.013	.014	.008	.004		
9.0	.119	.067	.032	.102	.058	.028	.071	.041	.020	.041	.024	.012	.013	.008	.004		
10.0	.113	.063	.029	.098	.055	.025	.068	.038	.018	.040	.023	.011	.013	.007	.004		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm										
NAME: 62001000701.20W.4K					TYPE: 62001000701.20W.4K			WEIGHT:		
SPEC.: 62001000701.20W.4K					DIM.: 1175*65*42mm			SERIAL No.:		
MFR.:					SUR.: 1169*57mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	20.2	19.2	20.4	20.6	19.1	20.4	19.4	20.6	20.8
3H	19.6	20.8	19.9	21.0	21.3	19.9	21.0	20.2	21.3	21.5
4H	19.9	21.0	20.2	21.3	21.5	20.2	21.3	20.5	21.5	21.8
6H	20.0	21.1	20.4	21.4	21.6	20.3	21.4	20.6	21.6	21.9
8H	20.1	21.1	20.4	21.3	21.6	20.3	21.3	20.7	21.6	21.9
12H	20.0	21.0	20.4	21.3	21.6	20.3	21.3	20.7	21.6	21.9
4H 2H	19.2	20.3	19.5	20.5	20.8	19.4	20.5	19.7	20.7	21.0
3H	20.1	21.0	20.4	21.3	21.6	20.3	21.3	20.6	21.5	21.9
4H	20.5	21.3	20.8	21.7	22.0	20.7	21.6	21.1	21.9	22.2
6H	20.7	21.5	21.1	21.8	22.2	20.9	21.7	21.3	22.1	22.4
8H	20.7	21.5	21.2	21.8	22.2	21.0	21.7	21.4	22.1	22.5
12H	20.8	21.4	21.2	21.8	22.2	21.0	21.7	21.4	22.0	22.5
8H 4H	20.6	21.3	21.0	21.7	22.0	20.8	21.5	21.2	21.9	22.3
6H	20.9	21.5	21.3	21.9	22.3	21.1	21.7	21.6	22.1	22.5
8H	21.0	21.5	21.4	21.9	22.4	21.2	21.7	21.7	22.2	22.6
12H	21.0	21.5	21.5	21.9	22.4	21.3	21.7	21.7	22.2	22.6
12H 4H	20.6	21.2	21.0	21.6	22.0	20.8	21.4	21.2	21.8	22.2
6H	20.9	21.4	21.4	21.8	22.3	21.1	21.6	21.6	22.1	22.5
8H	21.0	21.4	21.5	21.9	22.4	21.2	21.7	21.7	22.1	22.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.7				
1.5H	+ 0.5 / - 0.5					+ 0.5 / - 0.4				
2.0H	+ 1.2 / - 0.8					+ 1.3 / - 0.8				

CIE Pub.117, 2673 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
Area: 0.066 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	60	54	69	60	54	68	59	54	48
0.80	79	69	64	78	69	63	76	68	63	57
1.00	86	77	71	85	77	71	83	77	71	65
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	99	94	89	96	91	87	81
2.50	104	98	94	102	97	93	99	94	91	83
3.00	107	101	97	105	100	96	101	97	94	86
4.00	110	105	102	107	104	100	103	100	98	89
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2026-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity: 65.0%
Test Distance: 12.177m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

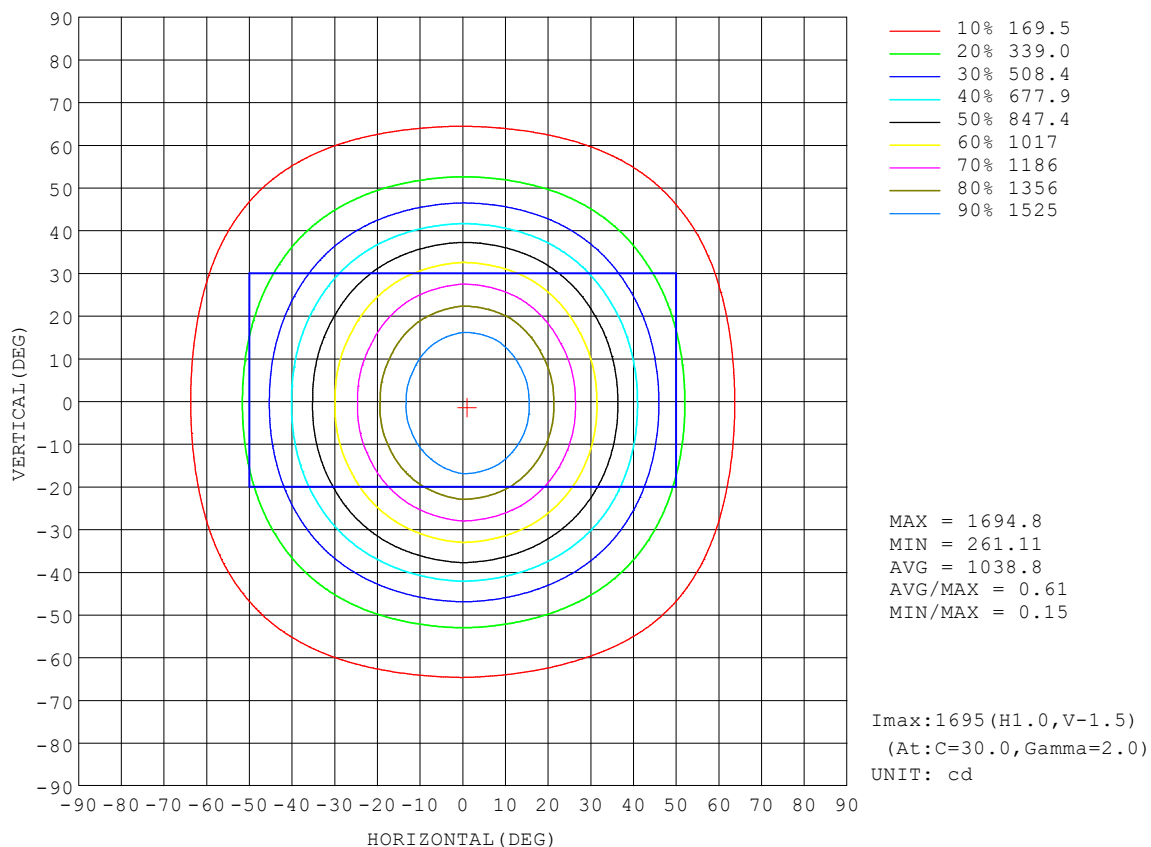


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

AAI Figure

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

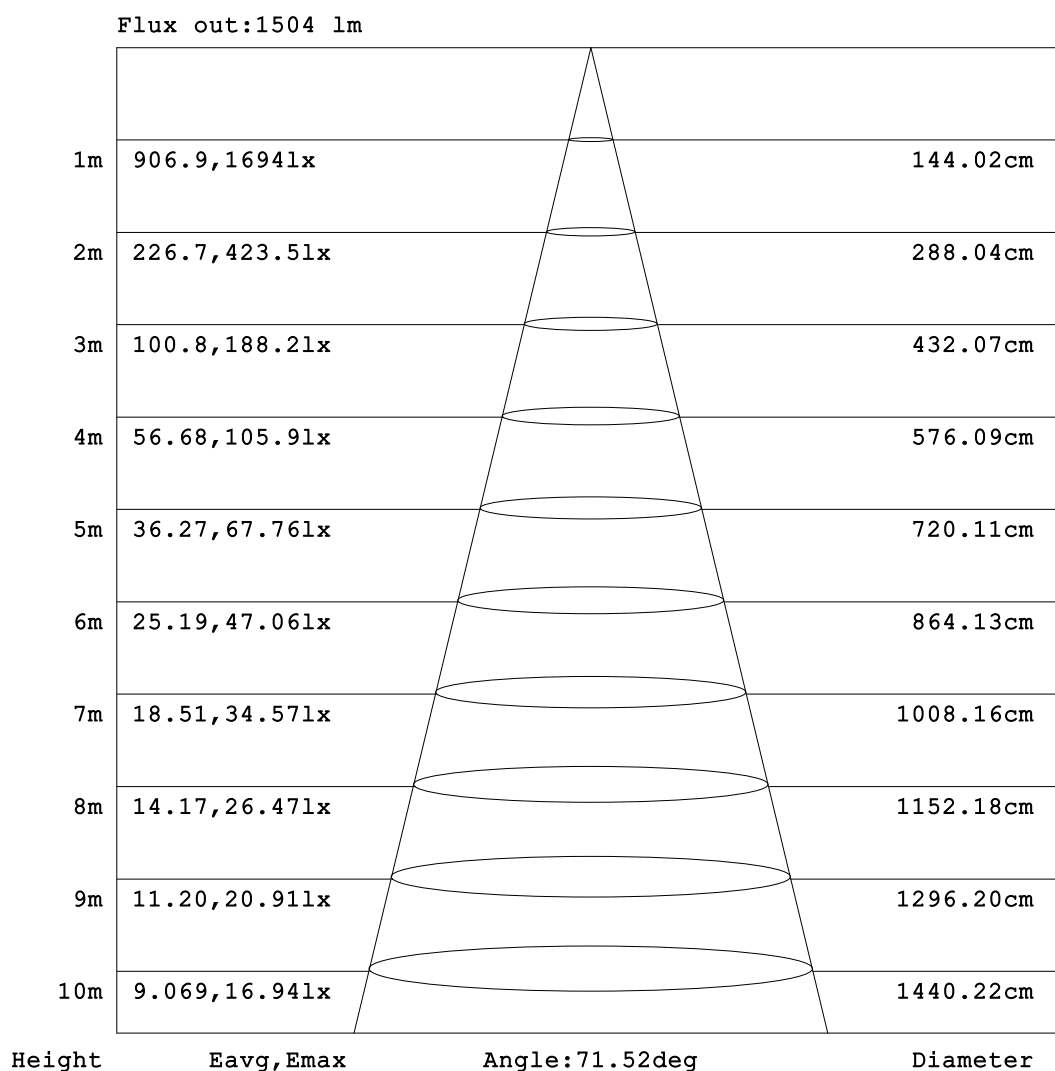


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2026-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.471
 Humidity: 65.0%
 Test Distance: 12.177m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

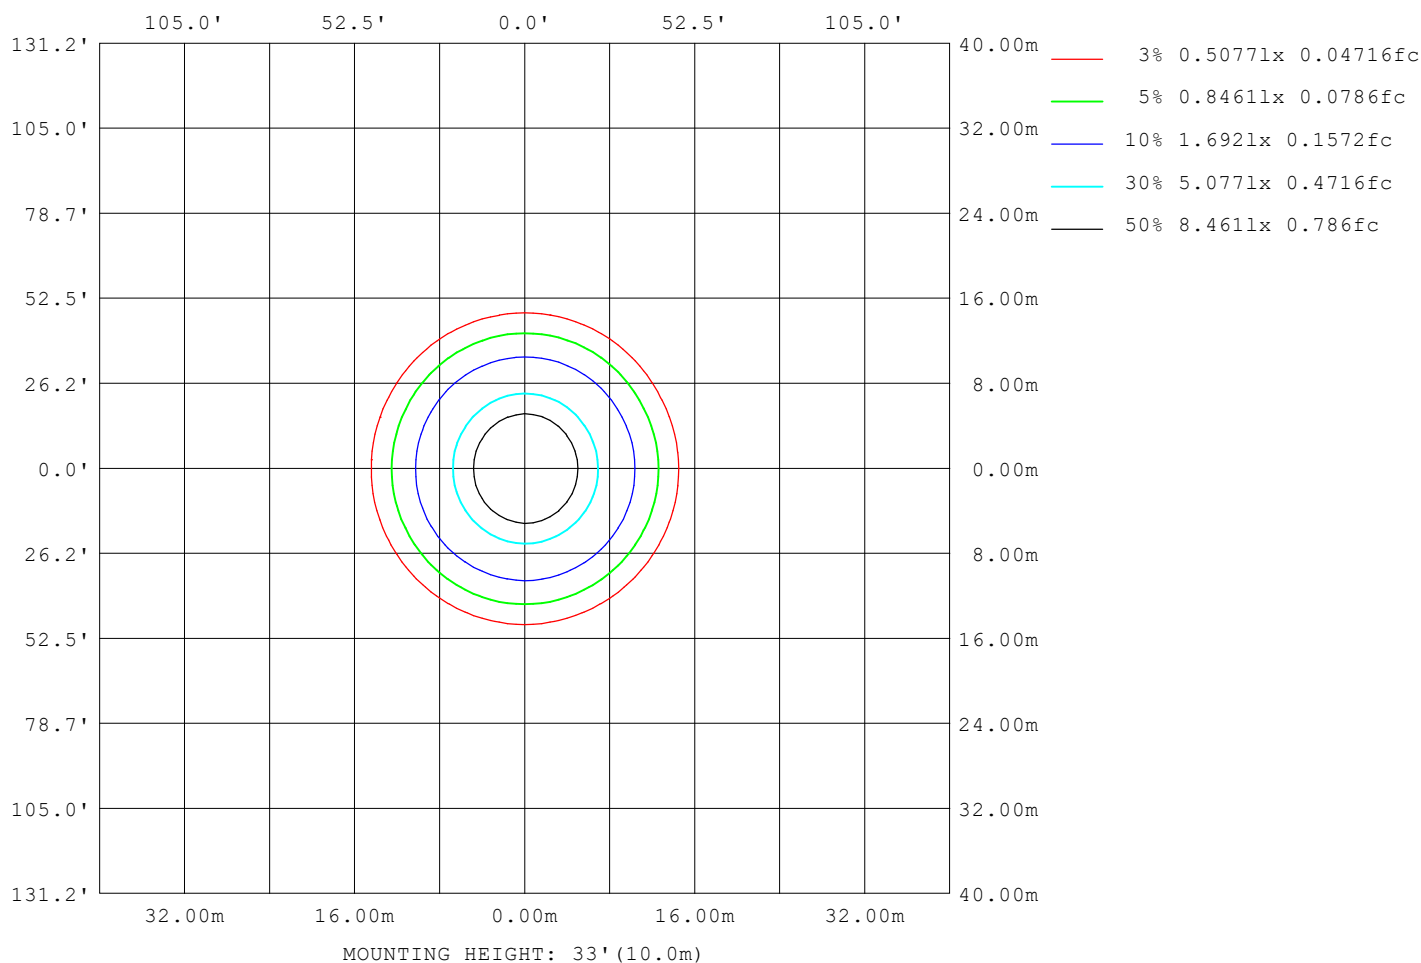

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5640
L_0~180 (75) av	4294
L_0~180 (85) av	2109
L_90~270 (65) av	5911
L_90~270 (75) av	4526
L_90~270 (85) av	2177
L_45 (65) av	5714
L_45 (75) av	4356
L_45 (85) av	2219

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks:

Planar Illuminance Curve

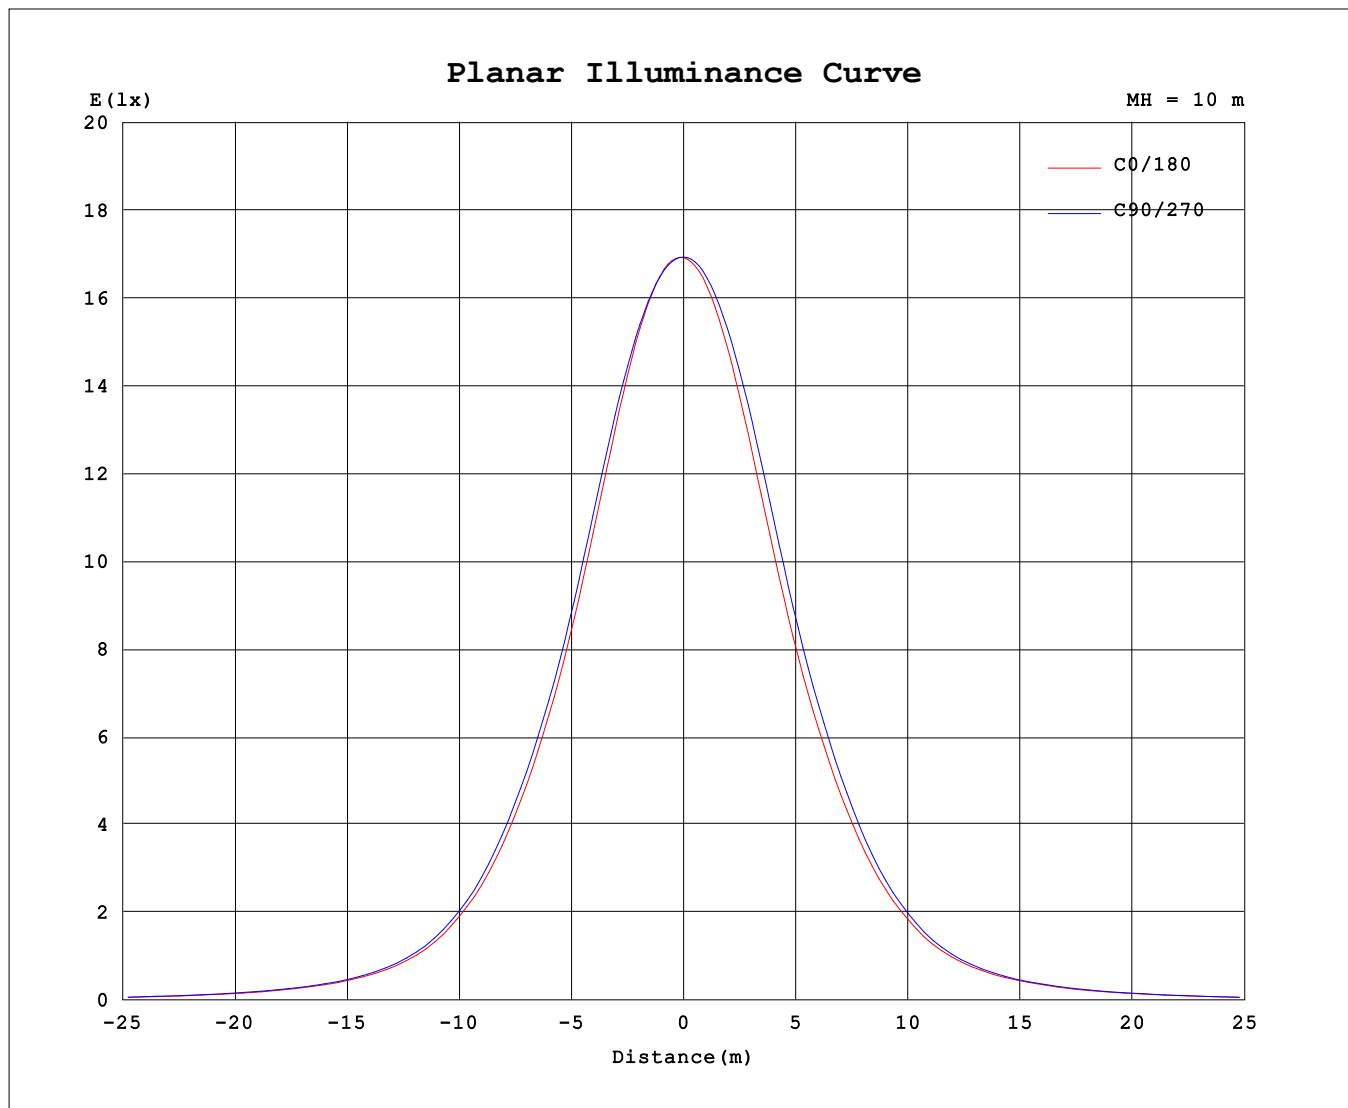

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2026-04-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity: 65.0%
Test Distance: 12.177m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.11V I:0.0950A P:21.100W PF:0.9613 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2672.84x1 lm		
NAME: 62001000701.20W.4K	TYPE: 62001000701.20W.4K	WEIGHT:
SPEC.: 62001000701.20W.4K	DIM.: 1175*65*42mm	SERIAL No.:
MFR.:	SUR.: 1169*57mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1693	1693	1693	1693	1693	1693	1693	1693	1693	1693	1693	1693						
5	1686	1688	1687	1682	1674	1668	1665	1666	1672	1679	1684	1684						
10	1635	1643	1647	1641	1621	1602	1593	1597	1616	1631	1637	1633						
15	1540	1556	1569	1566	1533	1501	1482	1491	1523	1550	1553	1541						
20	1398	1419	1441	1446	1408	1362	1336	1349	1391	1424	1427	1403						
25	1235	1256	1282	1289	1249	1201	1175	1190	1236	1268	1266	1238						
30	1065	1085	1110	1118	1081	1036	1014	1029	1072	1100	1094	1066						
35	894	915	935	948	917	876	853	866	902	929	924	896						
40	713	731	747	761	733	701	681	691	718	739	733	710						
45	541	554	565	575	553	533	518	523	544	558	552	535						
50	387	394	402	412	401	384	374	376	390	399	398	382						
55	283	286	292	299	292	282	278	279	287	292	289	278						
60	212	214	217	224	220	213	210	211	216	220	217	209						
65	157	159	160	166	163	159	157	159	162	164	160	154						
70	113	114	115	120	118	115	114	114	117	118	116	111						
75	72.8	74.0	74.9	78.1	76.4	75.1	73.9	74.4	76.0	76.6	74.4	70.9						
80	37.2	38.5	39.3	40.9	40.0	40.1	38.2	38.5	39.7	39.3	38.3	36.2						
85	11.5	12.4	12.8	13.1	13.5	13.9	12.7	12.8	13.1	11.9	12.1	11.1						
90	2.39	0.94	1.35	1.58	1.30	0.90	0.66	1.13	1.32	0.95	1.31	1.09						
95	1.34	0.76	0.68	0.53	0.62	0.71	0.74	0.80	0.75	0.77	0.78	0.76						
100	0.55	0.72	0.67	0.71	0.61	0.76	0.87	0.82	0.89	0.74	0.84	0.75						
105	0.69	0.85	0.75	0.94	0.83	0.93	1.06	0.97	1.13	0.97	1.04	0.84						
110	0.92	1.07	1.01	1.21	1.10	1.17	1.32	1.22	1.43	1.28	1.32	1.10						
115	1.17	1.34	1.32	1.55	1.42	1.48	1.64	1.56	1.81	1.67	1.67	1.42						
120	1.53	1.69	1.69	1.93	1.81	1.83	2.05	1.97	2.24	2.11	2.10	1.83						
125	1.95	2.12	2.14	2.38	2.25	2.27	2.49	2.45	2.71	2.60	2.57	2.28						
130	2.40	2.59	2.61	2.88	2.74	2.73	3.02	2.98	3.22	3.12	3.07	2.79						
135	2.93	3.11	3.13	3.40	3.27	3.26	3.58	3.54	3.76	3.65	3.61	3.33						
140	3.48	3.66	3.66	3.94	3.80	3.81	4.11	4.06	4.26	4.14	4.12	3.87						
145	3.98	4.17	4.16	4.43	4.30	4.36	4.66	4.62	4.79	4.67	4.66	4.39						
150	4.54	4.74	4.70	4.94	4.82	4.92	5.20	5.14	5.34	5.19	5.19	4.96						
155	5.12	5.28	5.22	5.46	5.36	5.46	5.74	5.66	5.85	5.69	5.70	5.51						
160	5.68	5.83	5.74	5.94	5.86	5.99	6.27	6.17	6.32	6.18	6.20	6.04						
165	6.24	6.34	6.21	6.42	6.34	6.44	6.79	6.59	6.72	6.57	6.64	6.48						
170	6.73	6.77	6.63	6.81	6.74	6.87	7.10	6.92	7.03	6.88	6.99	6.87						
175	7.05	7.07	6.92	6.99	6.97	7.01	7.18	7.10	7.08	7.05	7.04	7.08						
180	7.16	7.15	7.03	7.03	7.03	7.04	7.22	7.10	7.10	7.05	7.05	7.08						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2026-04-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:12.177m [K=1.0000]
Remarks: