


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 72.97 lm/W
MODEL	74002000100	Imax (cd)	1442	S/MH(C0/180)	0.50	
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	0.56	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	592.51	$\eta$ UP,DN(C0-180)	0.4,44.3	
NOMINAL FLUX(lm)	592.506	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.4,54.9	
LAMPS INSIDE	1	$\eta$ up (%)	0.8	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	230	$\eta$ down (%)	99.2	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

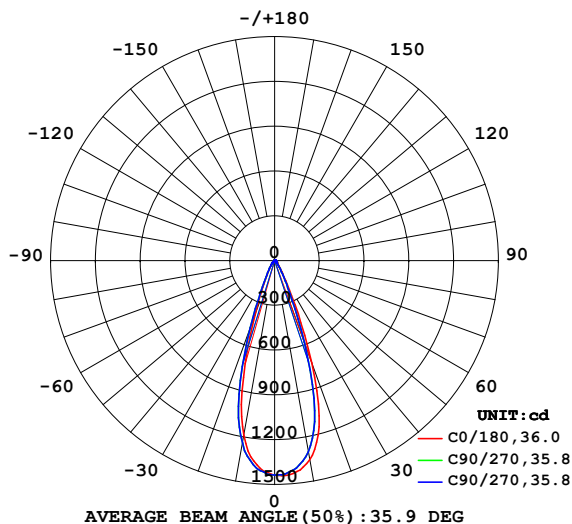

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

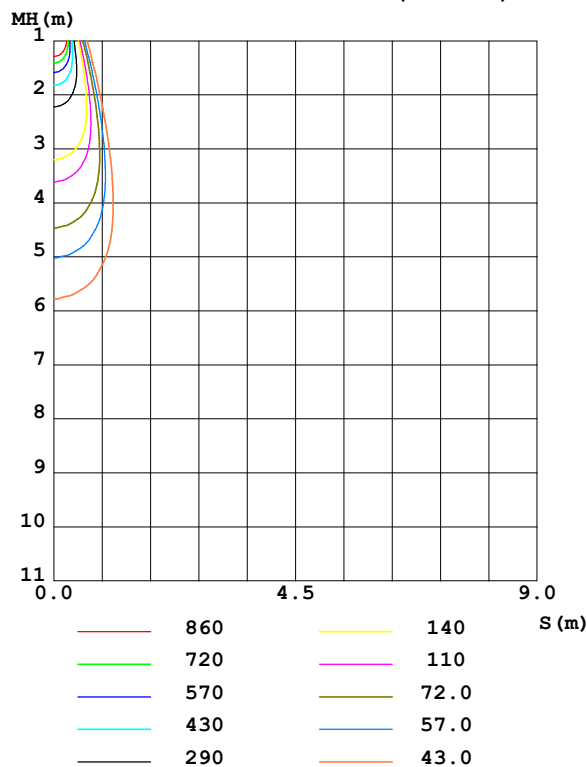

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C90	C180	C270					$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1189	1242	1356	1302					0- 10	129.9	129.9	21.9,21.9
20	388.4	478.4	729.4	582.7					10- 20	258.9	388.8	65.6,65.6
30	86.19	96.30	131.8	113.2					20- 30	116.9	505.7	85.3,85.3
40	33.75	36.84	41.00	35.62					30- 40	38.97	544.7	91.9,91.9
50	17.51	20.27	20.27	16.53					40- 50	20.24	564.9	95.3,95.3
60	9.670	10.27	11.38	10.50					50- 60	12.52	577.4	97.5,97.5
70	3.564	4.382	5.914	5.143					60- 70	7.671	585.1	98.8,98.8
80	0.3969	0.5633	1.134	0.8047					70- 80	2.474	587.6	99.2,99.2
90	0.0233	0.0233	0.0292	0.0292					80- 90	0.2318	587.8	99.2,99.2
100	0.0233	0.0408	0.0524	0.0291					90-100	0.0347	587.8	99.2,99.2
110	0.0233	0.0641	0.0991	0.0349					100-110	0.0473	587.9	99.2,99.2
120	0.0699	0.1109	0.1692	0.1277					110-120	0.0847	588.0	99.2,99.2
130	0.2675	0.2807	0.4439	0.4544					120-130	0.1895	588.2	99.3,99.3
140	1.010	0.9050	1.282	1.379					130-140	0.5329	588.7	99.4,99.4
150	2.227	2.089	2.547	2.677					140-150	1.081	589.8	99.5,99.5
160	3.248	3.239	3.662	3.704					150-160	1.365	591.1	99.8,99.8
170	3.504	3.529	3.702	3.747					160-170	1.020	592.2	99.9,99.9
180	3.539	3.572	3.563	3.577					170-180	0.3423	592.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 556.05 lm

%lum = 93.8%

%lamp = 93.8%

Conical surface Flux(120deg): 577.43 lm

%lum = 97.5%


%lamp = 97.5%

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

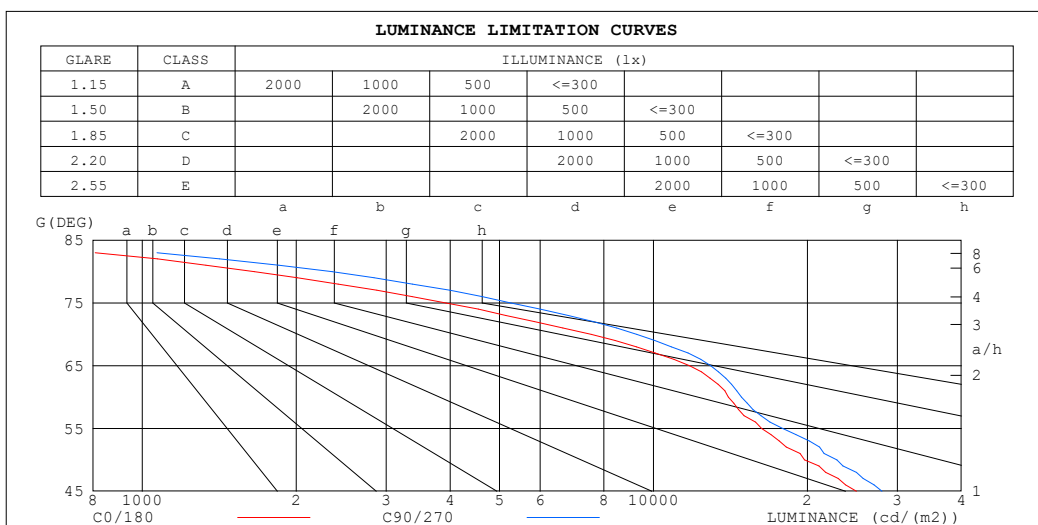


C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators:  
Test Date: 2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity: 65.0%  
Test Distance: 8.690m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046		Lamp Flux:592.506x1 lm
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.91	.98	.94	.91	.95	.92	.89	.93	.90	.88	.90	.88	.86	.85
4.0	.94	.89	.86	.93	.88	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81
5.0	.89	.85	.81	.89	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.85	.80	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
8.0	.78	.73	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.71	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.66	.65
10.0	.73	.68	.65	.72	.68	.64	.71	.67	.64	.71	.67	.64	.70	.66	.64	.63

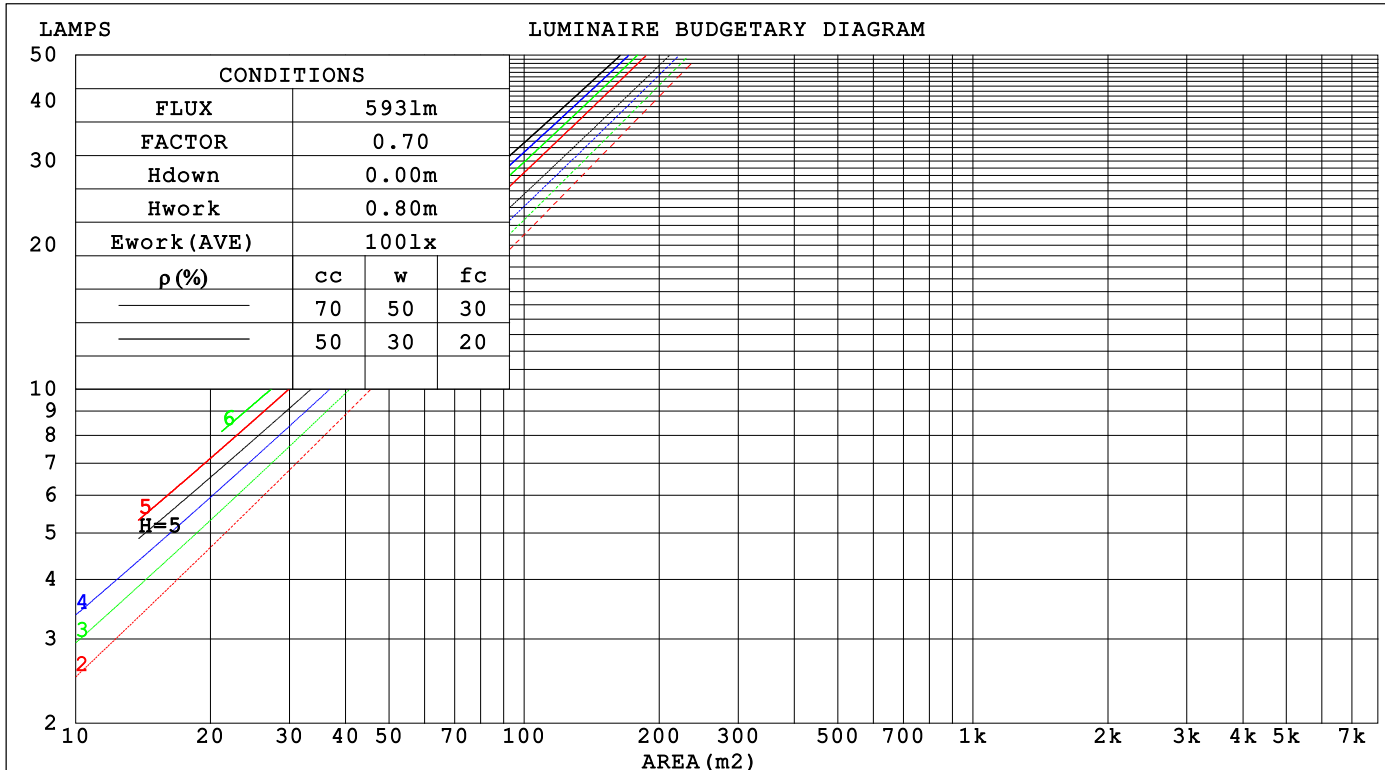

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz			UTHDi:0.19% ITHDi:17.52% KDisp:0.9046			Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH			TYPE: 8W			WEIGHT:		
SPEC.: 3000K			DIM.:			SERIAL No.:		
MFR.: CALEX			SUR.: 0.00138			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.161	.091	.029	.154	.088	.028	.141	.081	.026	.129	.074	.024	.118	.068	.022		
2.0	.151	.083	.025	.146	.080	.025	.135	.075	.023	.125	.070	.022	.116	.065	.021		
3.0	.142	.076	.023	.137	.074	.022	.128	.069	.021	.120	.066	.020	.112	.062	.019		
4.0	.134	.070	.020	.130	.068	.020	.122	.065	.019	.115	.062	.019	.108	.059	.018		
5.0	.126	.064	.019	.123	.063	.018	.116	.060	.018	.110	.058	.017	.104	.055	.017		
6.0	.120	.060	.017	.117	.059	.017	.111	.057	.017	.105	.055	.016	.100	.053	.016		
7.0	.114	.056	.016	.111	.055	.016	.106	.053	.015	.101	.052	.015	.096	.050	.015		
8.0	.108	.053	.015	.106	.052	.015	.101	.051	.014	.097	.049	.014	.093	.048	.014		
9.0	.104	.050	.014	.101	.049	.014	.097	.048	.014	.093	.047	.013	.090	.046	.013		
10.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.090	.045	.013	.087	.044	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.176	.164	.152	.151	.140	.131	.103	.097	.091	.059	.056	.053	.019	.018	.017		
2.0	.160	.139	.121	.137	.119	.105	.094	.083	.073	.054	.048	.043	.017	.016	.014		
3.0	.146	.120	.099	.125	.103	.085	.086	.072	.060	.050	.042	.035	.016	.014	.012		
4.0	.135	.105	.082	.116	.090	.071	.079	.063	.050	.046	.037	.030	.015	.012	.010		
5.0	.125	.093	.069	.107	.080	.060	.074	.056	.042	.043	.033	.025	.014	.011	.008		
6.0	.117	.083	.059	.100	.072	.051	.069	.050	.036	.040	.030	.022	.013	.010	.007		
7.0	.110	.075	.051	.094	.065	.044	.065	.046	.032	.038	.027	.019	.012	.009	.006		
8.0	.103	.069	.045	.089	.060	.039	.062	.042	.028	.036	.025	.017	.012	.008	.005		
9.0	.098	.063	.040	.084	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005		
10.0	.093	.059	.036	.080	.051	.031	.056	.036	.022	.032	.021	.013	.011	.007	.004		

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm										
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH					TYPE: 8W			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.:		
MFR.: CALEX					SUR.: 0.00138			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.6	17.4	16.8	17.6	17.7	17.0	17.8	17.2	18.0	18.1
3H	17.0	17.8	17.3	18.0	18.2	17.5	18.2	17.7	18.4	18.6
4H	17.0	17.7	17.3	18.0	18.2	17.5	18.2	17.8	18.4	18.7
6H	17.0	17.6	17.3	17.9	18.1	17.5	18.1	17.8	18.4	18.6
8H	16.9	17.6	17.2	17.8	18.1	17.4	18.1	17.7	18.3	18.6
12H	16.9	17.5	17.2	17.8	18.1	17.4	18.0	17.7	18.3	18.5
4H 2H	16.9	17.6	17.1	17.8	18.0	17.2	17.9	17.5	18.1	18.3
3H	17.3	18.0	17.7	18.2	18.5	17.7	18.4	18.1	18.6	18.9
4H	17.4	17.9	17.7	18.2	18.5	17.8	18.4	18.2	18.7	19.0
6H	17.3	17.8	17.7	18.1	18.5	17.8	18.2	18.1	18.6	18.9
8H	17.2	17.7	17.7	18.1	18.4	17.7	18.2	18.1	18.5	18.9
12H	17.2	17.6	17.6	18.0	18.4	17.7	18.1	18.1	18.5	18.9
8H 4H	17.3	17.8	17.7	18.1	18.5	17.7	18.2	18.1	18.5	18.9
6H	17.2	17.6	17.7	18.0	18.4	17.7	18.0	18.1	18.5	18.9
8H	17.2	17.5	17.6	17.9	18.4	17.6	18.0	18.1	18.4	18.8
12H	17.1	17.4	17.6	17.9	18.3	17.6	17.8	18.0	18.3	18.8
12H 4H	17.2	17.7	17.7	18.0	18.4	17.7	18.1	18.1	18.5	18.9
6H	17.2	17.5	17.6	17.9	18.4	17.6	18.0	18.1	18.4	18.8
8H	17.1	17.4	17.6	17.9	18.3	17.6	17.9	18.0	18.3	18.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.9 / - 1.3					+ 0.9 / - 1.2				
1.5H	+ 0.9 / - 0.9					+ 1.1 / - 0.9				
2.0H	+ 1.5 / - 1.0					+ 1.7 / - 1.1				

CIE Pub.117, 592.5 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.8)  
Area: 0.00138 m2

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	106	103	100	104	100	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators:  
Test Date: 2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity: 65.0%  
Test Distance: 8.690m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

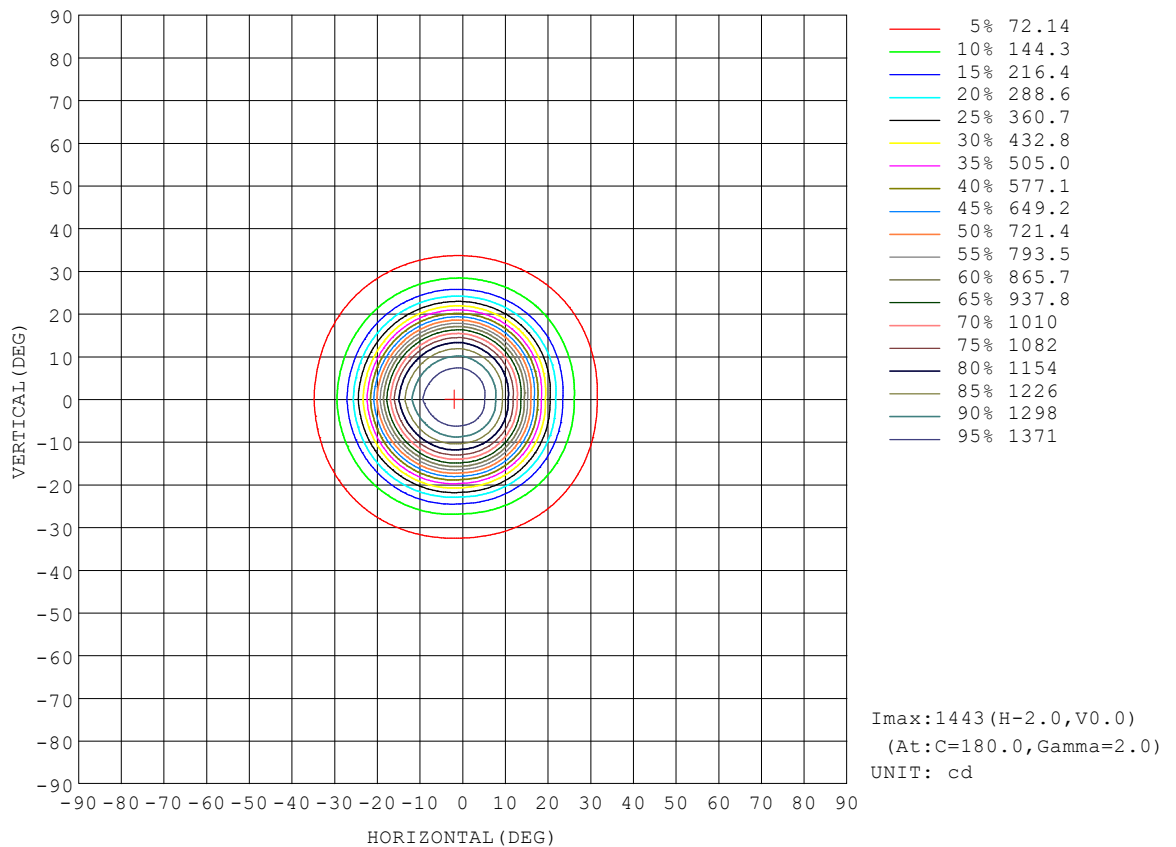


C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:



**AAI Figure**

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

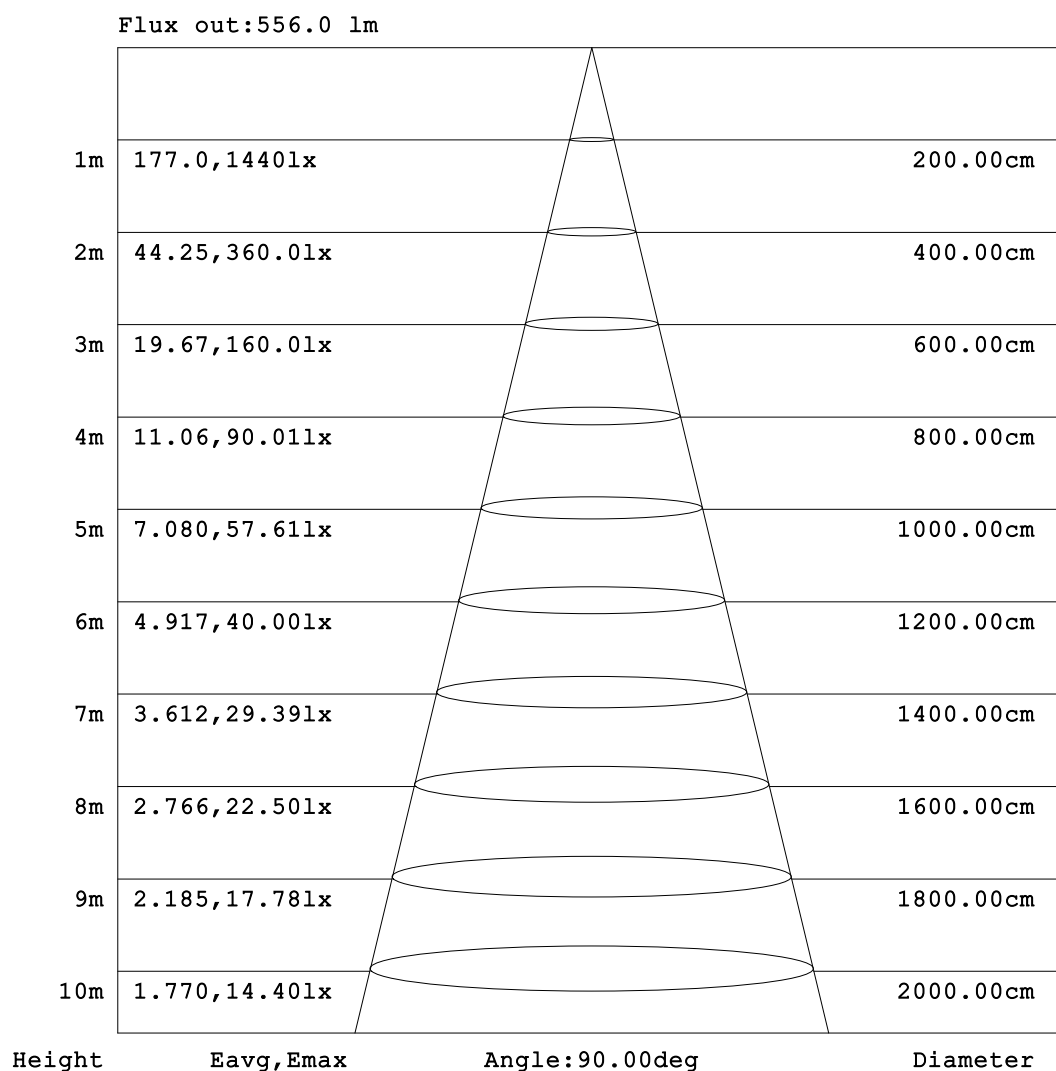


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 2023-10-12

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

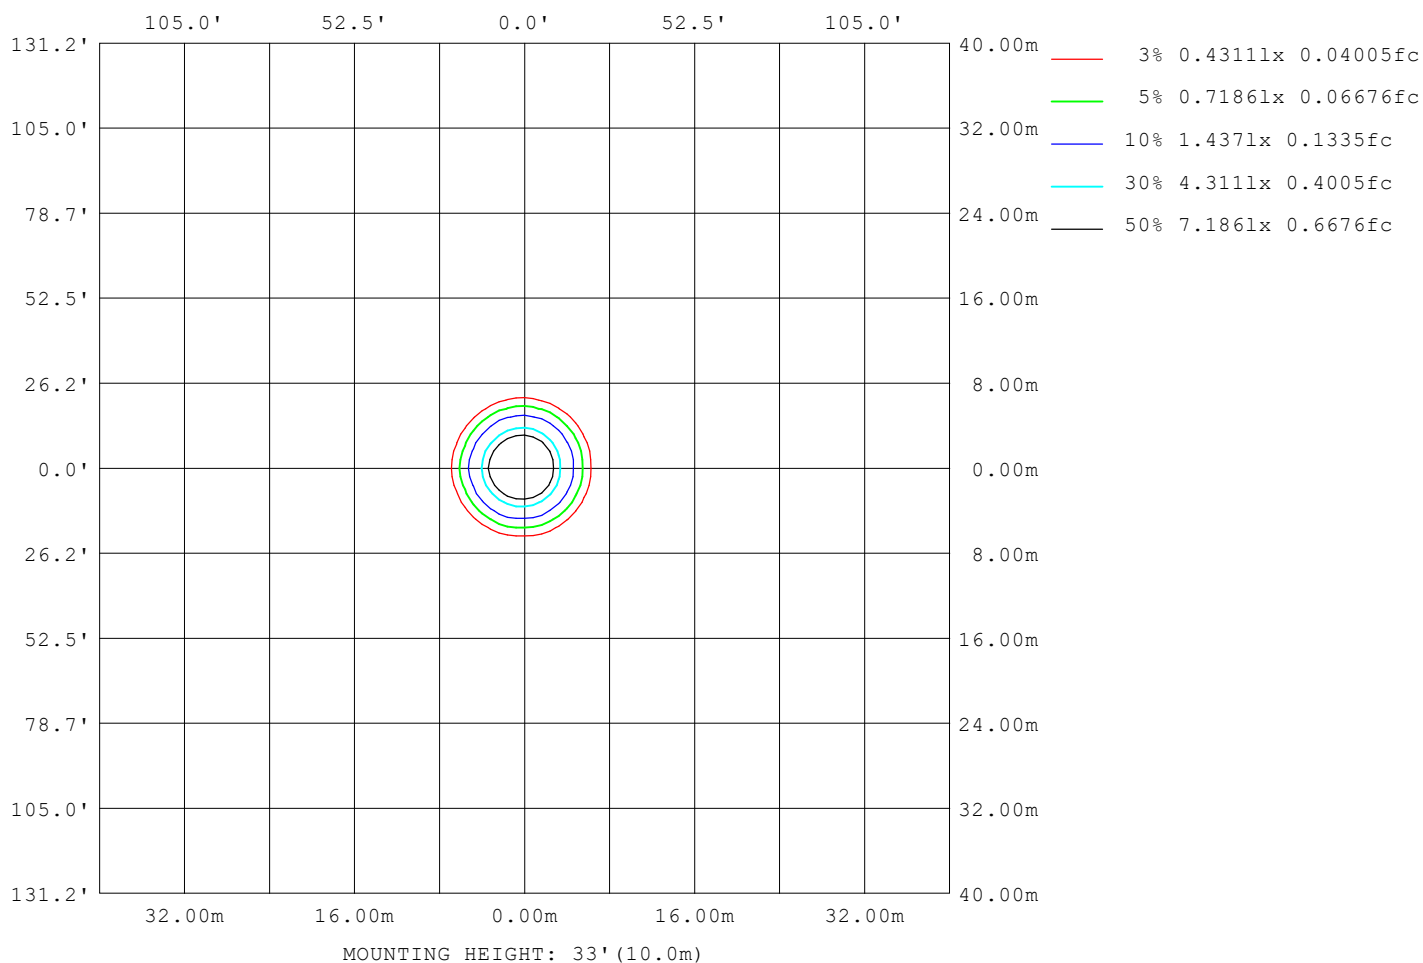

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

### LED Avg.L Report

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13585
L_0~180 (75) av	6161
L_0~180 (85) av	1185
L_90~270 (65) av	13450
L_90~270 (75) av	5849
L_90~270 (85) av	874
L_45 (65) av	13615
L_45 (75) av	6106
L_45 (85) av	1046

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

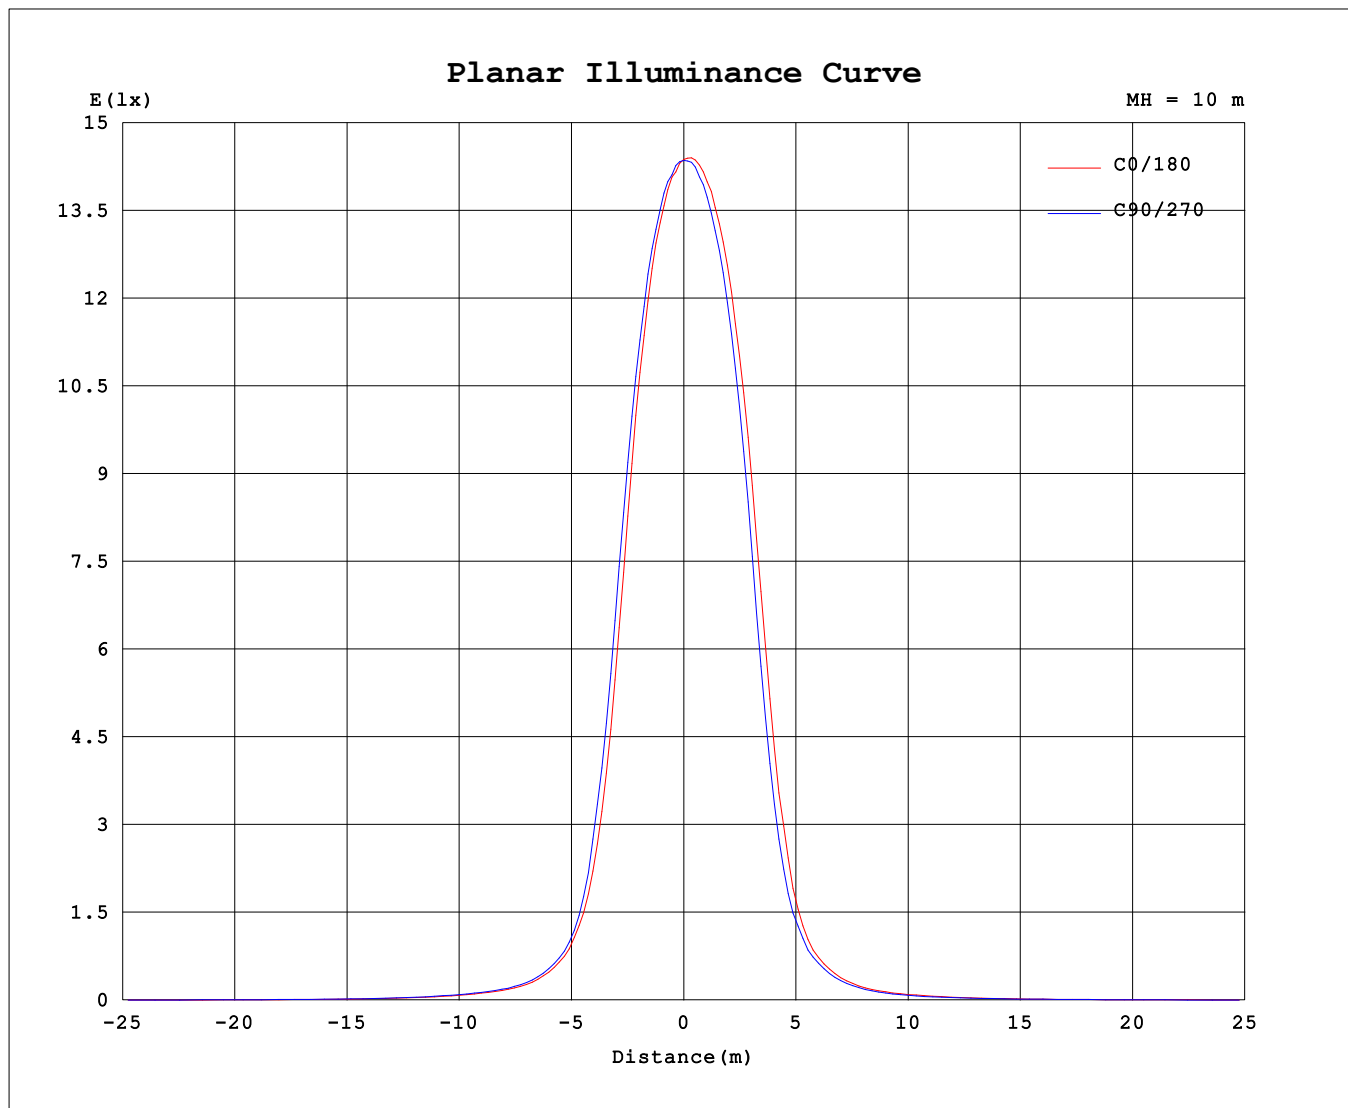

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2023-10-12

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
 Humidity: 65.0%  
 Test Distance: 8.690m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.21V I:0.0390A P:8.1200W PF:0.8910 Freq:49.99Hz		
UTHDi:0.19% ITHDi:17.52% KDisp:0.9046 Lamp Flux:592.506x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	1437	1437	1437	1437														
5	1373	1396	1431	1411														
10	1189	1242	1356	1302														
15	811	925	1152	1041														
20	388	478	729	583														
25	172	195	327	245														
30	86.2	96.3	132	113														
35	49.6	55.3	70.1	61.7														
40	33.8	36.8	41.0	35.6														
45	24.3	27.3	27.8	23.6														
50	17.5	20.3	20.3	16.5														
55	12.9	14.2	15.1	12.9														
60	9.67	10.3	11.4	10.5														
65	6.86	7.55	8.98	8.14														
70	3.56	4.38	5.91	5.14														
75	1.40	1.88	3.00	2.30														
80	0.40	0.56	1.13	0.80														
85	0.04	0.03	0.25	0.18														
90	0.02	0.02	0.03	0.03														
95	0.02	0.04	0.04	0.03														
100	0.02	0.04	0.05	0.03														
105	0.02	0.05	0.08	0.03														
110	0.02	0.06	0.10	0.03														
115	0.03	0.09	0.13	0.08														
120	0.07	0.11	0.17	0.13														
125	0.13	0.18	0.26	0.23														
130	0.27	0.28	0.44	0.45														
135	0.55	0.51	0.78	0.84														
140	1.01	0.91	1.28	1.38														
145	1.59	1.46	1.89	2.00														
150	2.23	2.09	2.55	2.68														
155	2.83	2.73	3.19	3.30														
160	3.25	3.24	3.66	3.70														
165	3.46	3.50	3.79	3.79														
170	3.50	3.53	3.70	3.75														
175	3.52	3.57	3.59	3.60														
180	3.54	3.57	3.56	3.58														

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2023-10-12

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.446  
Humidity:65.0%  
Test Distance:8.690m [K=1.0000]  
Remarks: