


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 82.66 lm/W
MODEL	74002000100	I _{max} (cd)	1567	S/MH(C0/180)	0.50	
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	0.57	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	649.25	η UP,DN(C0-180)	0.4,44.4	
NOMINAL FLUX(lm)	649.246	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,54.8	
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	230	η down (%)	99.2	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

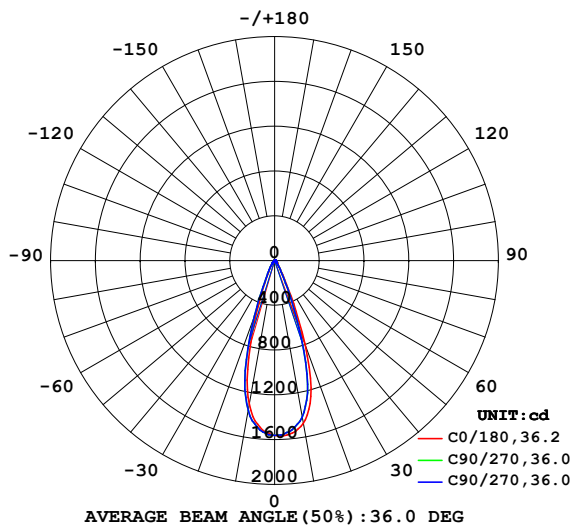

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

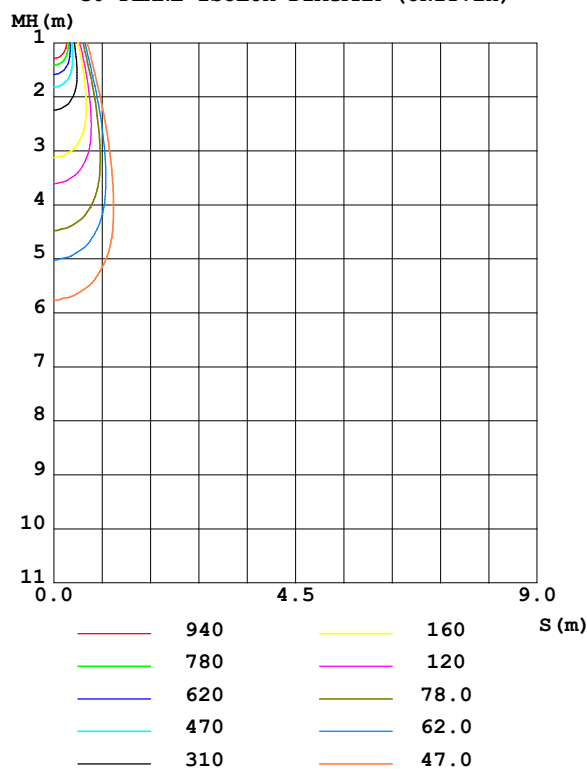

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	1303	1358	1478	1421					0- 10	141.5	141.5	21.8,21.8
20	433.3	526.5	795.4	640.7					10- 20	284.1	425.6	65.6,65.6
30	95.46	106.0	143.3	124.3					20- 30	128.2	553.8	85.3,85.3
40	37.29	40.49	44.75	39.07					30- 40	42.78	596.6	91.9,91.9
50	19.40	22.29	22.22	18.19					40- 50	22.26	618.9	95.3,95.3
60	10.72	11.26	12.50	11.56					50- 60	13.80	632.7	97.4,97.4
70	3.975	4.822	6.474	5.661					60- 70	8.452	641.1	98.7,98.7
80	0.4459	0.6231	1.230	0.8808					70- 80	2.723	643.8	99.2,99.2
90	0.0233	0.0233	0.0349	0.0353					80- 90	0.2562	644.1	99.2,99.2
100	0.0233	0.0467	0.0583	0.0350					90-100	0.0373	644.1	99.2,99.2
110	0.0233	0.0701	0.1047	0.0465					100-110	0.0522	644.2	99.2,99.2
120	0.0815	0.1282	0.1866	0.1452					110-120	0.0923	644.3	99.2,99.2
130	0.3012	0.3097	0.4893	0.5002					120-130	0.2099	644.5	99.3,99.3
140	1.109	0.9985	1.417	1.519					130-140	0.5877	645.1	99.4,99.4
150	2.436	2.287	2.799	2.935					140-150	1.186	646.3	99.5,99.5
160	3.561	3.538	4.010	4.056					150-160	1.494	647.8	99.8,99.8
170	3.823	3.860	4.073	4.109					160-170	1.119	648.9	99.9,99.9
180	3.887	3.922	3.905	3.922					170-180	0.3743	649.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 609.11 lm

%lum = 93.8%

%lamp = 93.8%

Conical surface Flux(120deg): 632.66 lm

%lum = 97.4%


%lamp = 97.4%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

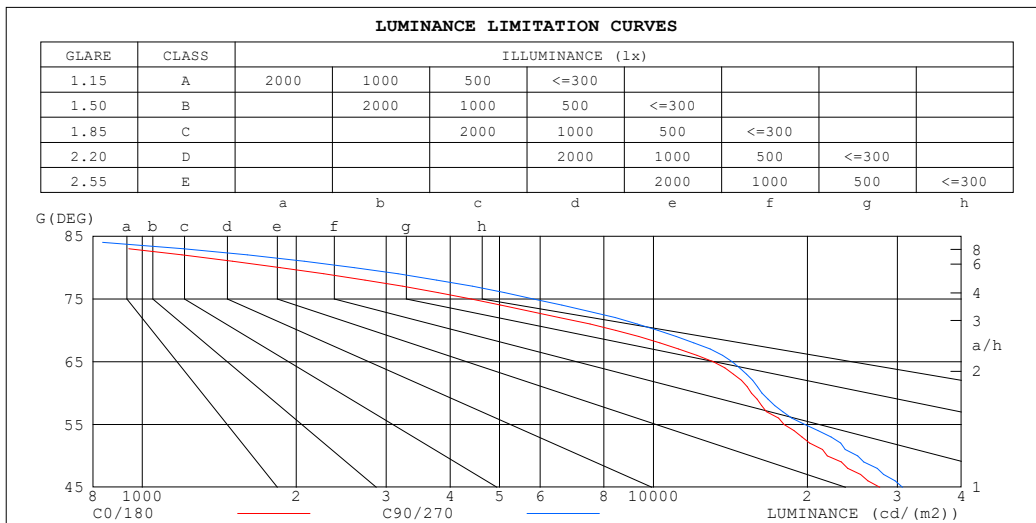

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	346	483
80	1862	2598
75	4402	5819
70	8428	10208
65	13089	14248
60	15545	16313
55	18007	19788
50	21884	25105
45	27707	30699


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz			UTHDi:0.20% ITHDi:19.21% KDisp:0.8953			Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH			TYPE: 8W			WEIGHT:		
SPEC.: 4000K			DIM.:			SERIAL No.:		
MFR.: CALEX			SUR.: 0.00138			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.91	.98	.94	.90	.95	.92	.89	.93	.90	.88	.90	.88	.86	.85
4.0	.94	.89	.86	.93	.88	.85	.91	.87	.84	.89	.85	.83	.87	.84	.82	.81
5.0	.89	.84	.81	.88	.84	.80	.87	.83	.80	.85	.82	.79	.83	.81	.78	.77
6.0	.85	.80	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.75	.73
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.72	.79	.75	.72	.78	.74	.72	.70
8.0	.78	.73	.70	.78	.73	.70	.77	.72	.69	.76	.72	.69	.75	.71	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
10.0	.72	.68	.64	.72	.67	.64	.71	.67	.64	.71	.67	.64	.70	.66	.64	.63

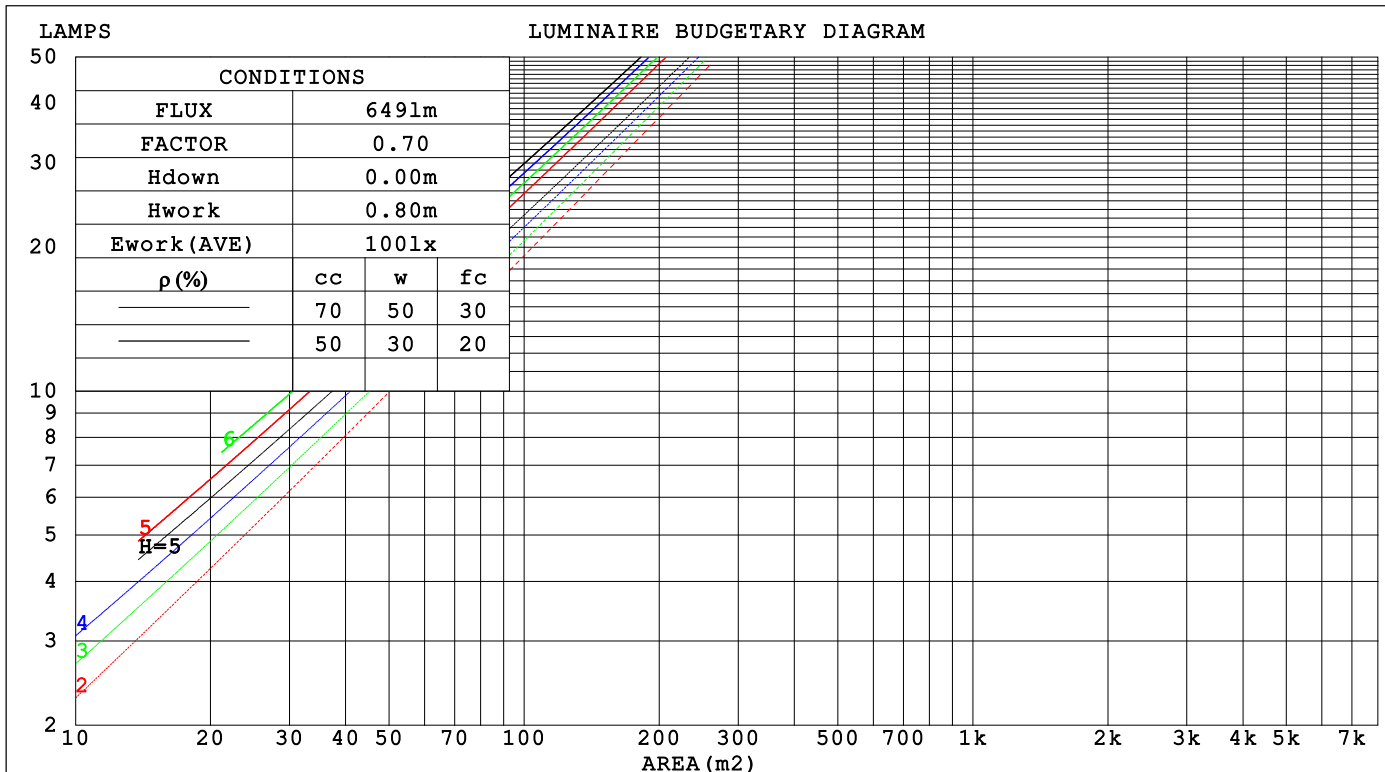

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz			UTHDi:0.20% ITHDi:19.21% KDisp:0.8953			Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH			TYPE: 8W			WEIGHT:		
SPEC.: 4000K			DIM.:			SERIAL No.:		
MFR.: CALEX			SUR.: 0.00138			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.161	.092	.029	.154	.088	.028	.141	.081	.026	.129	.075	.024	.118	.069	.022		
2.0	.152	.083	.025	.146	.080	.025	.135	.075	.023	.125	.070	.022	.116	.065	.021		
3.0	.142	.076	.023	.138	.074	.022	.128	.070	.021	.120	.066	.020	.112	.062	.019		
4.0	.134	.070	.020	.130	.068	.020	.122	.065	.019	.115	.062	.019	.108	.059	.018		
5.0	.127	.065	.019	.123	.063	.018	.116	.060	.018	.110	.058	.017	.104	.056	.017		
6.0	.120	.060	.017	.117	.059	.017	.111	.057	.017	.105	.055	.016	.100	.053	.016		
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.096	.050	.015		
8.0	.109	.053	.015	.106	.052	.015	.101	.051	.014	.097	.049	.014	.093	.048	.014		
9.0	.104	.050	.014	.101	.049	.014	.097	.048	.014	.093	.047	.013	.090	.046	.013		
10.0	.099	.048	.013	.097	.047	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.176	.164	.152	.151	.140	.131	.103	.097	.091	.059	.056	.053	.019	.018	.017		
2.0	.160	.139	.121	.137	.119	.105	.094	.083	.073	.054	.048	.043	.017	.016	.014		
3.0	.146	.120	.099	.125	.103	.085	.086	.072	.060	.050	.042	.035	.016	.014	.012		
4.0	.135	.105	.082	.116	.090	.071	.079	.063	.050	.046	.037	.030	.015	.012	.010		
5.0	.125	.093	.069	.107	.080	.060	.074	.056	.042	.043	.033	.025	.014	.011	.008		
6.0	.117	.083	.059	.100	.072	.051	.069	.050	.036	.040	.030	.022	.013	.010	.007		
7.0	.110	.075	.051	.094	.065	.044	.065	.046	.032	.038	.027	.019	.012	.009	.006		
8.0	.103	.069	.045	.089	.060	.039	.062	.042	.028	.036	.025	.017	.012	.008	.005		
9.0	.098	.063	.040	.084	.055	.035	.058	.039	.025	.034	.023	.015	.011	.007	.005		
10.0	.093	.059	.036	.080	.051	.031	.056	.036	.022	.032	.021	.013	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm										
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH					TYPE: 8W			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.:		
MFR.: CALEX					SUR.: 0.00138			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	17.8	17.2	18.0	18.1	17.3	18.1	17.6	18.3	18.5
3H	17.4	18.1	17.7	18.4	18.6	17.8	18.6	18.1	18.8	19.0
4H	17.4	18.1	17.7	18.3	18.6	17.9	18.6	18.1	18.8	19.0
6H	17.4	18.0	17.7	18.3	18.5	17.8	18.5	18.1	18.7	19.0
8H	17.3	17.9	17.6	18.2	18.5	17.8	18.4	18.1	18.7	18.9
12H	17.3	17.9	17.6	18.2	18.4	17.7	18.3	18.1	18.6	18.9
4H 2H	17.2	17.9	17.5	18.2	18.4	17.5	18.2	17.8	18.5	18.7
3H	17.7	18.3	18.1	18.6	18.9	18.1	18.7	18.4	19.0	19.3
4H	17.8	18.3	18.1	18.6	18.9	18.2	18.7	18.5	19.0	19.3
6H	17.7	18.2	18.1	18.5	18.9	18.1	18.6	18.5	19.0	19.3
8H	17.6	18.1	18.0	18.5	18.8	18.1	18.5	18.5	18.9	19.3
12H	17.6	18.0	18.0	18.4	18.8	18.0	18.4	18.4	18.8	19.2
8H 4H	17.7	18.1	18.1	18.5	18.9	18.1	18.5	18.5	18.9	19.3
6H	17.6	18.0	18.1	18.4	18.8	18.0	18.4	18.5	18.8	19.2
8H	17.6	17.9	18.0	18.3	18.8	18.0	18.3	18.4	18.7	19.2
12H	17.5	17.8	18.0	18.2	18.7	17.9	18.2	18.4	18.7	19.2
12H 4H	17.6	18.0	18.0	18.4	18.8	18.0	18.4	18.4	18.8	19.2
6H	17.6	17.9	18.0	18.3	18.8	18.0	18.3	18.4	18.7	19.2
8H	17.5	17.8	18.0	18.2	18.7	17.9	18.2	18.4	18.7	19.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.9 / - 1.3					+ 0.9 / - 1.2				
1.5H	+ 0.9 / - 0.8					+ 1.1 / - 0.9				
2.0H	+ 1.5 / - 1.0					+ 1.7 / - 1.1				

CIE Pub.117, 649.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.5)
Area: 0.00138 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	97	92	89	96	92	88	84
1.25	102	97	94	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	106	103	100	104	100	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

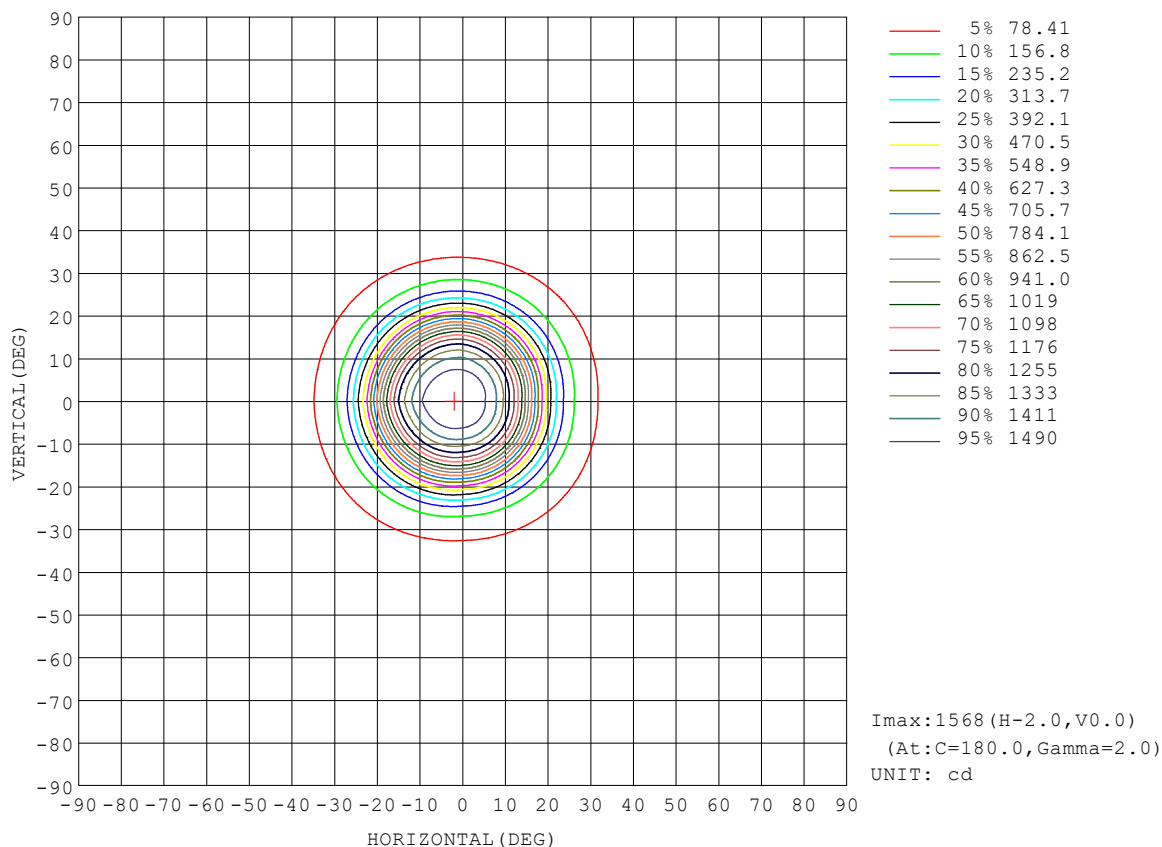


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

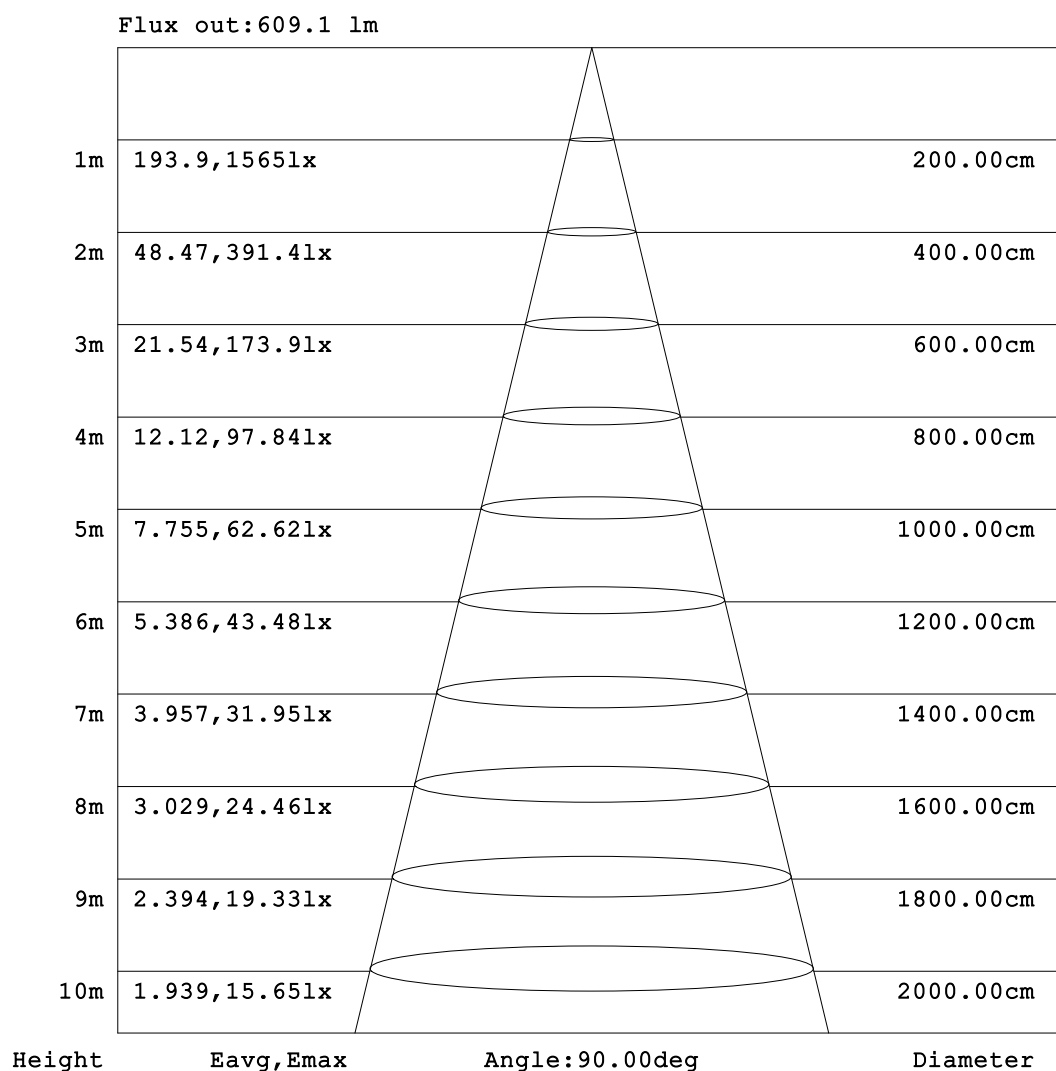


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

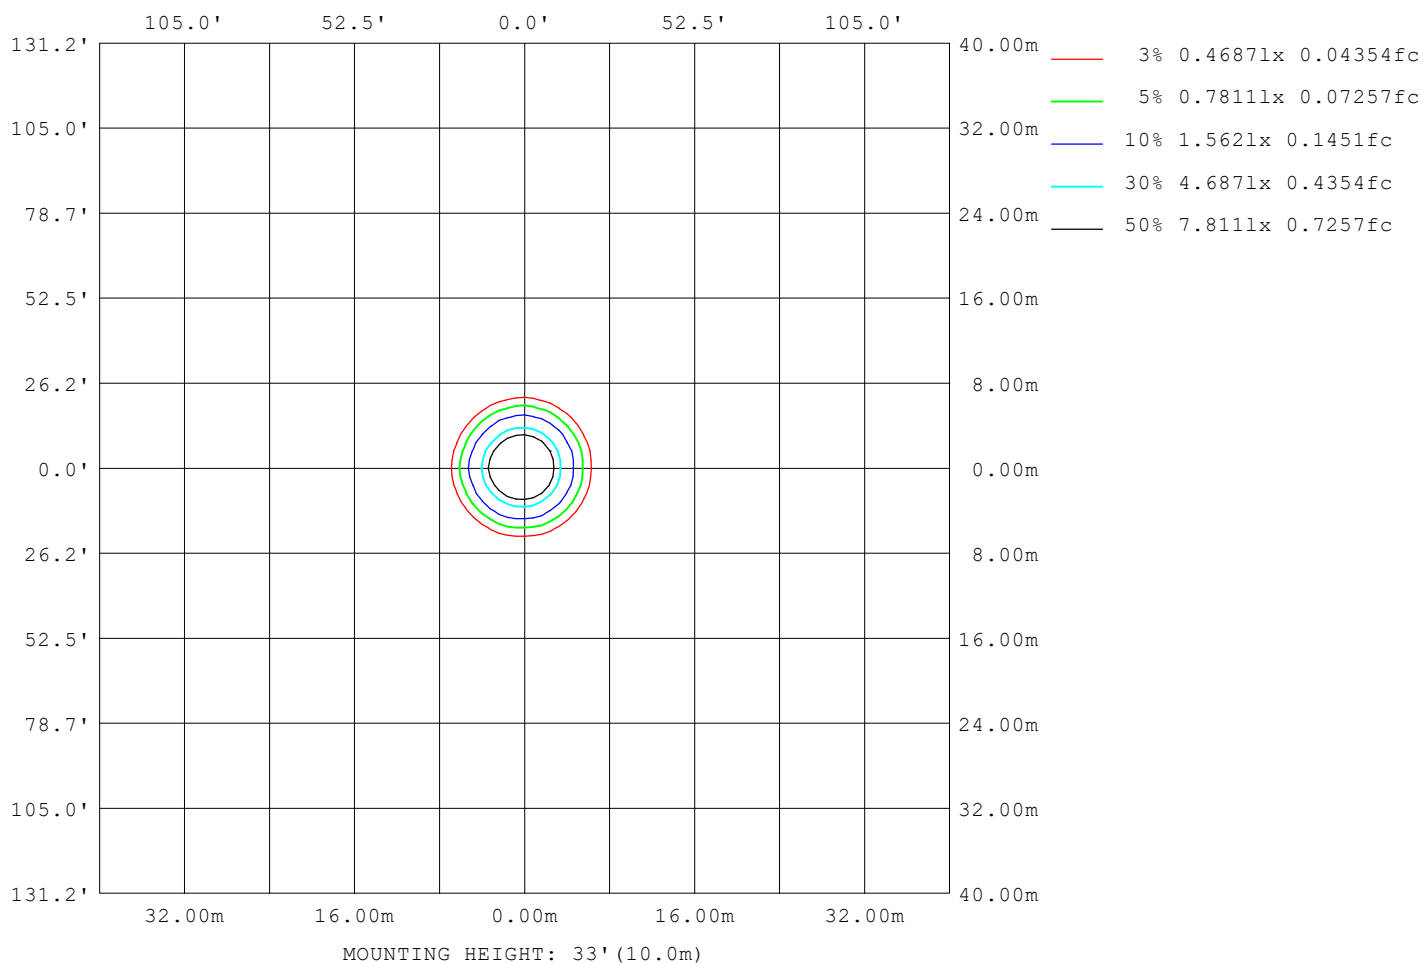

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14954
L_0~180 (75) av	6783
L_0~180 (85) av	1284
L_90~270 (65) av	14809
L_90~270 (75) av	6460
L_90~270 (85) av	1043
L_45 (65) av	14980
L_45 (75) av	6730
L_45 (85) av	1192

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

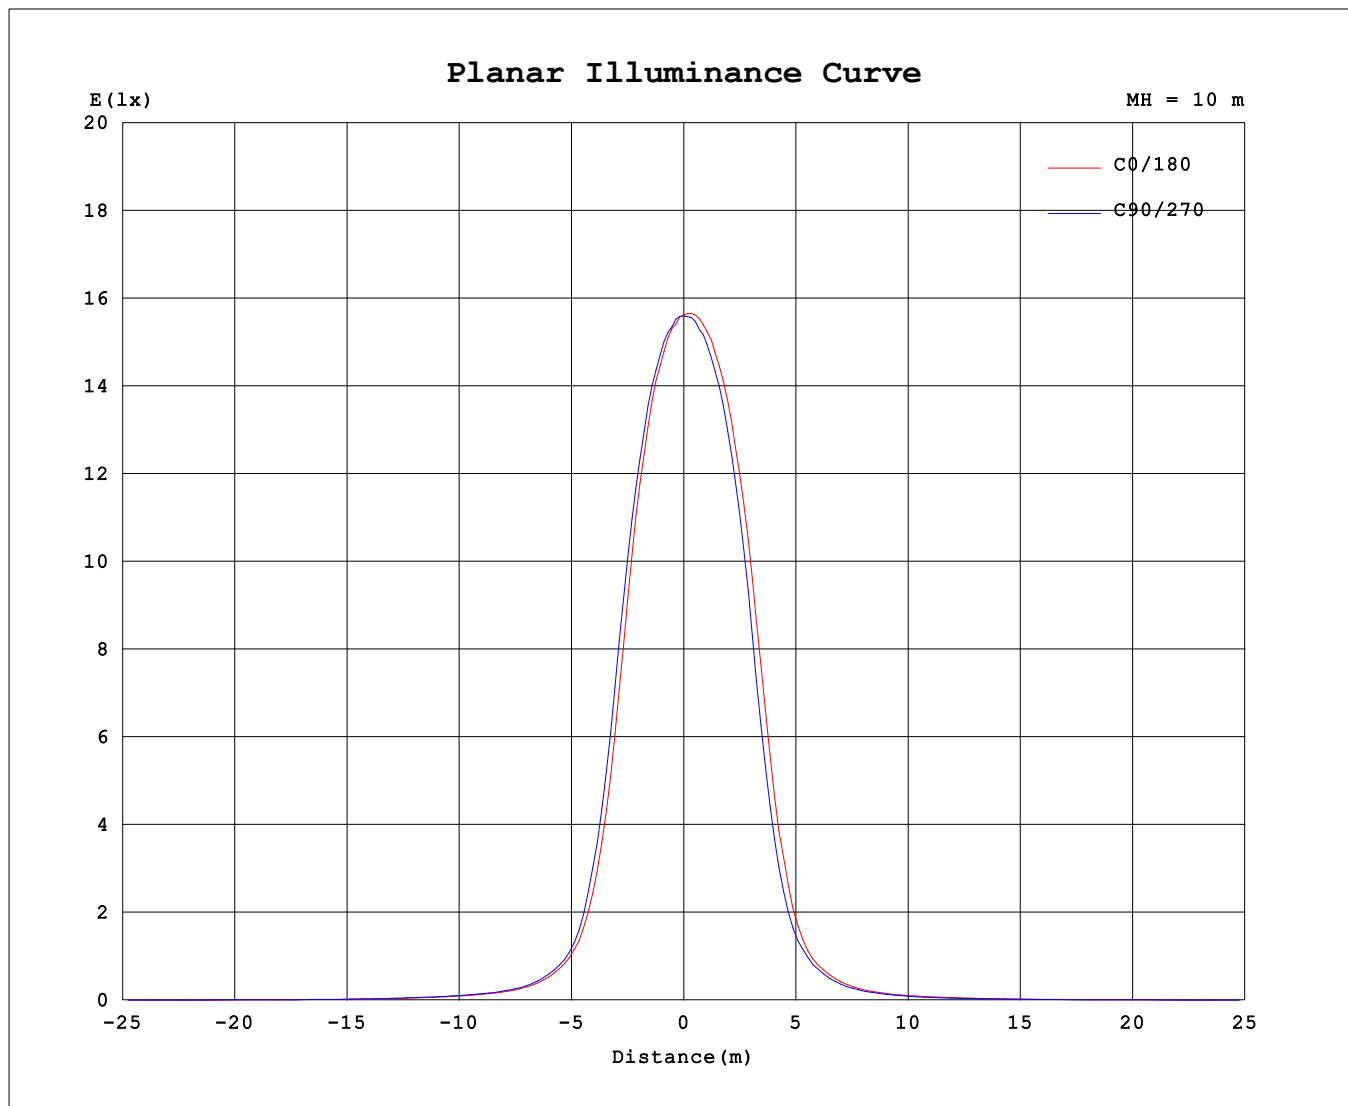

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-10-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.26V I:0.0385A P:7.8540W PF:0.8827 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.21% KDisp:0.8953 Lamp Flux:649.246x1 lm		
NAME: Calex Solux DLU72 8W 2CT Triac Dim 40D WH	TYPE: 8W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.: CALEX	SUR.: 0.00138	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	1561	1561	1561	1561														
5	1495	1520	1556	1535														
10	1303	1358	1478	1421														
15	900	1019	1257	1143														
20	433	526	795	641														
25	183	216	355	271														
30	95.5	106	143	124														
35	54.9	60.7	76.5	67.7														
40	37.3	40.5	44.8	39.1														
45	27.0	30.0	30.5	26.0														
50	19.4	22.3	22.2	18.2														
55	14.2	15.7	16.6	14.2														
60	10.7	11.3	12.5	11.6														
65	7.63	8.32	9.82	8.96														
70	3.98	4.82	6.47	5.66														
75	1.57	2.08	3.27	2.53														
80	0.45	0.62	1.23	0.88														
85	0.04	0.06	0.27	0.19														
90	0.02	0.02	0.03	0.04														
95	0.02	0.04	0.04	0.03														
100	0.02	0.05	0.06	0.03														
105	0.02	0.05	0.08	0.03														
110	0.02	0.07	0.10	0.05														
115	0.04	0.09	0.13	0.08														
120	0.08	0.13	0.19	0.15														
125	0.16	0.19	0.29	0.26														
130	0.30	0.31	0.49	0.50														
135	0.61	0.55	0.87	0.93														
140	1.11	1.00	1.42	1.52														
145	1.75	1.61	2.07	2.20														
150	2.44	2.29	2.80	2.94														
155	3.09	2.99	3.49	3.61														
160	3.56	3.54	4.01	4.06														
165	3.81	3.83	4.17	4.18														
170	3.82	3.86	4.07	4.11														
175	3.83	3.90	3.90	3.93														
180	3.89	3.92	3.90	3.92														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-10-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks: