


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 96.83 lm/W
MODEL	74002000300	Imax (cd)	868.2	S/MH(C0/180)	0.62	
NOMINAL POWER(W)	5	LOR(%)	100.0	S/MH(C90/270)	0.63	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	431.31	η UP,DN(C0-180)	0.7,49.5	
NOMINAL FLUX(lm)	431.312	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,49.2	
LAMPS INSIDE	1	η up (%)	1.3	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	230	η down (%)	98.7	CIBSE SHR MAX	0.65	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

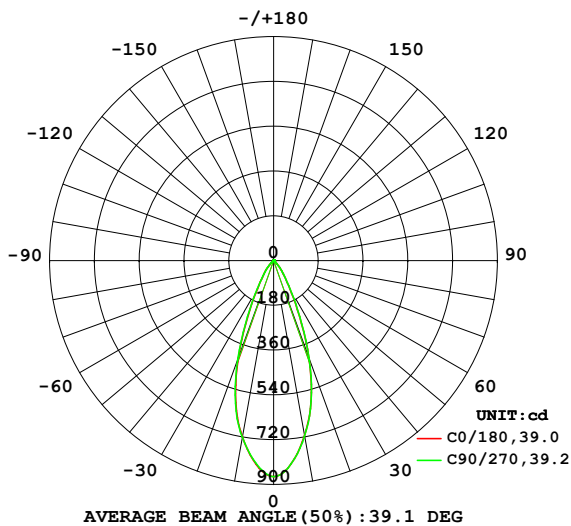

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

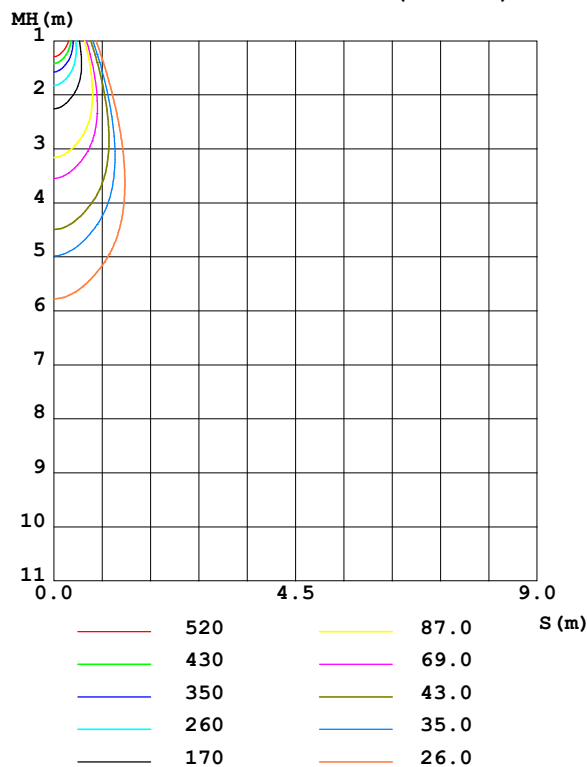

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	721.9	727.8	723.2	719.5	715.6	711.6	717.1	721.3	0- 10	74.98	74.98	17.4,17.4
20	415.2	425.7	422.6	419.7	416.2	411.4	418.8	416.0	10- 20	160.2	235.1	54.5,54.5
30	131.0	135.8	134.9	134.1	133.3	130.9	134.1	132.3	20- 30	115.4	350.5	81.3,81.3
40	43.63	44.96	45.28	46.03	45.64	45.22	45.77	44.48	30- 40	48.99	399.5	92.6,92.6
50	8.075	8.336	8.339	8.747	8.757	8.750	8.799	8.333	40- 50	17.39	416.9	96.7,96.7
60	2.833	2.801	2.719	2.739	2.744	2.794	2.927	2.912	50- 60	3.976	420.9	97.6,97.6
70	1.746	1.700	1.630	1.579	1.597	1.704	1.787	1.904	60- 70	2.146	423.0	98.1,98.1
80	1.253	1.176	1.063	1.018	1.069	1.201	1.232	1.424	70- 80	1.522	424.5	98.4,98.4
90	0.8480	0.7939	0.7526	0.6941	0.7247	0.8244	0.8153	0.9085	80- 90	1.071	425.6	98.7,98.7
100	0.0665	0.1211	0.2562	0.1247	0.0723	0.0840	0.3287	0.0840	90-100	0.3008	425.9	98.7,98.7
110	0.1297	0.2139	0.3709	0.2151	0.1506	0.2220	0.3344	0.2208	100-110	0.1956	426.1	98.8,98.8
120	0.2827	0.3065	0.3874	0.3007	0.4106	0.3119	0.4429	0.3149	110-120	0.2749	426.4	98.9,98.9
130	0.7618	0.6535	0.7543	0.6572	0.8310	0.6891	0.7872	0.6932	120-130	0.4440	426.8	99,99
140	1.347	1.401	1.432	1.397	1.449	1.473	1.456	1.467	130-140	0.8069	427.6	99.1,99.1
150	2.445	2.292	2.374	2.290	2.519	2.373	2.397	2.382	140-150	1.182	428.8	99.4,99.4
160	3.035	3.088	3.072	3.064	3.103	3.072	3.119	3.117	150-160	1.265	430.1	99.7,99.7
170	3.420	3.377	3.367	3.335	3.383	3.320	3.379	3.358	160-170	0.9278	431.0	99.9,99.9
180	3.432	3.449	3.407	3.442	3.423	3.437	3.425	3.436	170-180	0.3236	431.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 411.3 lm

%lum = 95.4%

%lamp = 95.4%

Conical surface Flux(120deg): 420.85 lm

%lum = 97.6%


%lamp = 97.6%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

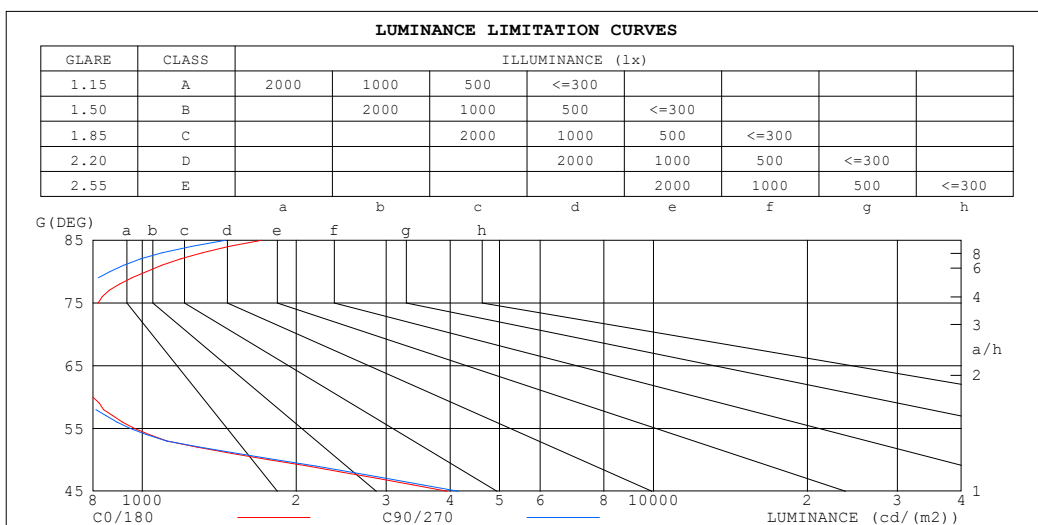

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1712	1453
80	1019	864
75	820	731
70	721	673
65	724	689
60	800	768
55	965	948
50	1775	1832
45	3942	4147


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.93	.92	.93	.91	.89	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.78
5.0	.88	.82	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.78	.74	.82	.77	.74	.81	.76	.73	.79	.75	.72	.78	.74	.72	.71
7.0	.79	.74	.70	.78	.73	.70	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.72	.68	.65	.71	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.63	.60	.68	.63	.60	.67	.63	.60	.66	.62	.59	.58

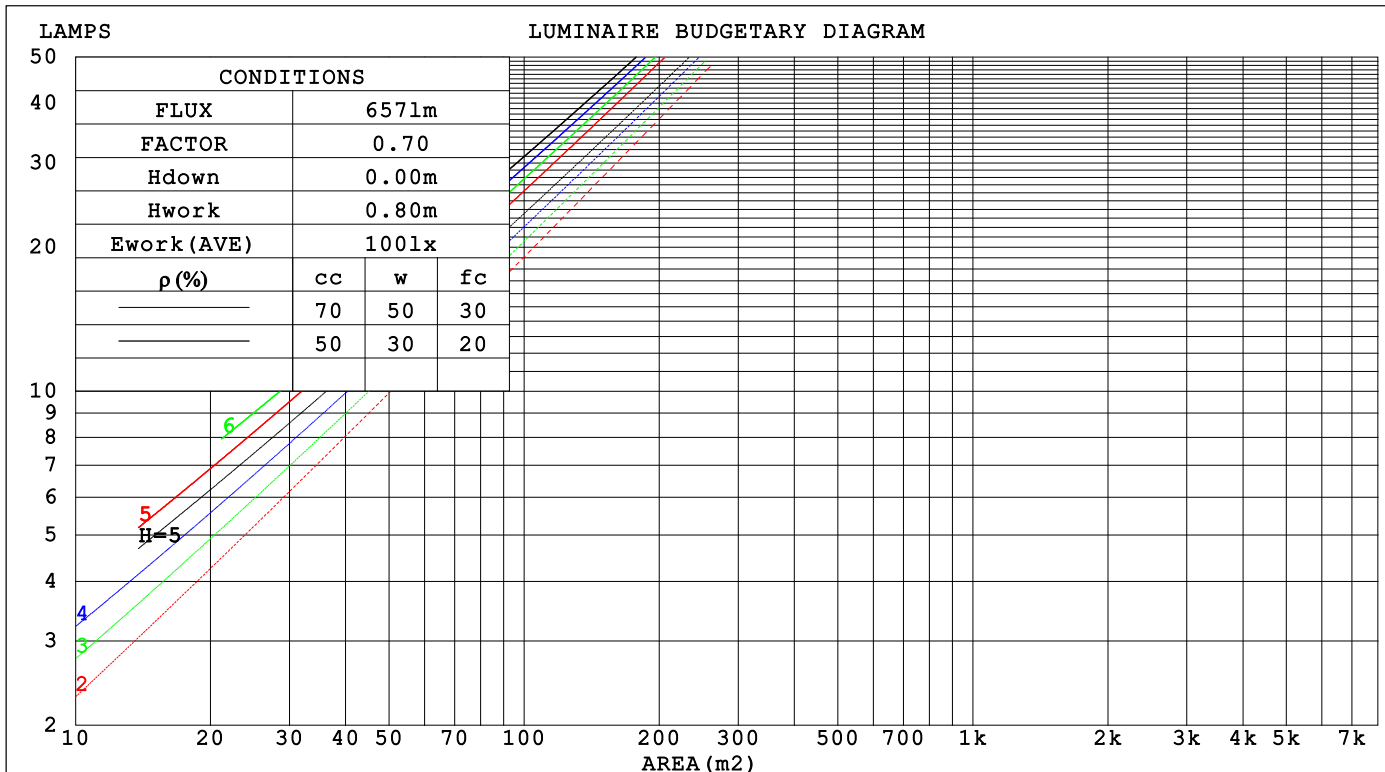

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D			WHType: 5W			Weight:		
SPEC.: 4000K			DIM.:			Instrument No.: HUP-IES-B3		
MFR.: CALEX			SUR.: 0.0475			shielding angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.168	.096	.030	.161	.092	.029	.148	.085	.027	.135	.078	.025	.124	.072	.023		
2.0	.158	.087	.027	.152	.084	.026	.141	.078	.024	.131	.073	.023	.121	.068	.022		
3.0	.149	.079	.024	.144	.077	.023	.134	.073	.022	.126	.069	.021	.117	.065	.020		
4.0	.141	.073	.022	.136	.071	.021	.128	.068	.020	.121	.065	.020	.113	.062	.019		
5.0	.133	.068	.020	.130	.067	.019	.123	.064	.019	.116	.061	.018	.110	.059	.018		
6.0	.127	.064	.018	.124	.062	.018	.117	.060	.017	.111	.058	.017	.106	.056	.017		
7.0	.121	.060	.017	.118	.059	.017	.112	.057	.016	.107	.055	.016	.102	.053	.016		
8.0	.116	.056	.016	.113	.056	.016	.108	.054	.015	.103	.052	.015	.099	.051	.015		
9.0	.111	.054	.015	.108	.053	.015	.104	.051	.015	.100	.050	.014	.096	.049	.014		
10.0	.106	.051	.014	.104	.050	.014	.100	.049	.014	.096	.048	.014	.093	.047	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.201	.201	.201	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021		
1.0	.181	.168	.156	.155	.144	.134	.106	.099	.093	.061	.057	.054	.019	.018	.017		
2.0	.165	.143	.124	.141	.123	.108	.097	.085	.075	.056	.049	.044	.018	.016	.014		
3.0	.151	.124	.102	.130	.107	.088	.089	.074	.062	.051	.043	.036	.017	.014	.012		
4.0	.140	.109	.085	.121	.094	.074	.083	.066	.052	.048	.038	.031	.015	.013	.010		
5.0	.131	.097	.072	.113	.084	.063	.078	.059	.044	.045	.034	.026	.014	.011	.009		
6.0	.123	.088	.062	.106	.076	.054	.073	.053	.038	.042	.031	.023	.014	.010	.008		
7.0	.116	.080	.054	.100	.069	.047	.069	.049	.034	.040	.029	.020	.013	.009	.007		
8.0	.111	.074	.048	.095	.064	.042	.066	.045	.030	.038	.026	.018	.012	.009	.006		
9.0	.105	.068	.043	.091	.059	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005		
10.0	.101	.064	.039	.087	.055	.034	.060	.039	.024	.035	.023	.014	.011	.008	.005		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm										
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D						WHType: 5W			Weight:	
SPEC.: 4000K						DIM.:			Instrument No.: HUP-IES-B3	
MFR.: CALEX						SUR.: 0.0475			shielding angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.9	11.8	11.2	12.0	12.1	11.1	11.9	11.3	12.1	12.3
3H	10.9	11.7	11.2	11.9	12.1	11.0	11.8	11.3	12.0	12.2
4H	10.9	11.6	11.2	11.9	12.1	11.0	11.7	11.3	12.0	12.2
6H	11.0	11.7	11.3	11.9	12.2	11.0	11.7	11.3	12.0	12.2
8H	11.0	11.7	11.3	12.0	12.2	11.0	11.7	11.4	12.0	12.3
12H	11.1	11.8	11.5	12.0	12.3	11.1	11.7	11.4	12.0	12.3
4H 2H	10.7	11.5	11.0	11.7	12.0	10.9	11.6	11.2	11.8	12.1
3H	10.7	11.4	11.1	11.7	12.0	10.8	11.5	11.2	11.8	12.1
4H	10.8	11.4	11.2	11.7	12.0	10.9	11.5	11.3	11.8	12.1
6H	11.0	11.5	11.4	11.8	12.2	11.0	11.5	11.4	11.8	12.2
8H	11.1	11.6	11.5	11.9	12.3	11.1	11.5	11.5	11.9	12.3
12H	11.3	11.7	11.7	12.1	12.5	11.2	11.6	11.6	12.0	12.4
8H 4H	10.8	11.2	11.2	11.6	12.0	10.8	11.3	11.2	11.7	12.1
6H	11.0	11.4	11.4	11.8	12.2	11.0	11.4	11.5	11.8	12.3
8H	11.2	11.6	11.7	12.0	12.5	11.2	11.5	11.6	11.9	12.4
12H	11.5	11.8	12.0	12.3	12.8	11.4	11.7	11.9	12.2	12.7
12H 4H	10.7	11.2	11.2	11.6	12.0	10.8	11.2	11.2	11.6	12.0
6H	11.0	11.3	11.5	11.8	12.3	11.0	11.4	11.5	11.8	12.3
8H	11.3	11.6	11.7	12.0	12.5	11.2	11.5	11.7	12.0	12.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 3.7					+ 2.1 / - 4.1				
1.5H	+ 3.9 / - 3.7					+ 4.0 / - 4.1				
2.0H	+ 3.7 / - 1.2					+ 4.2 / - 1.5				

CIE Pub.117, 431.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.9)
Area: 0.00708 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	89	85	94	88	85	92	87	84	80
1.00	99	93	90	98	93	89	96	92	89	85
1.25	103	97	94	102	97	94	99	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	103	102	95
4.00	113	111	108	111	109	107	107	105	104	96
5.00	115	112	110	112	110	109	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

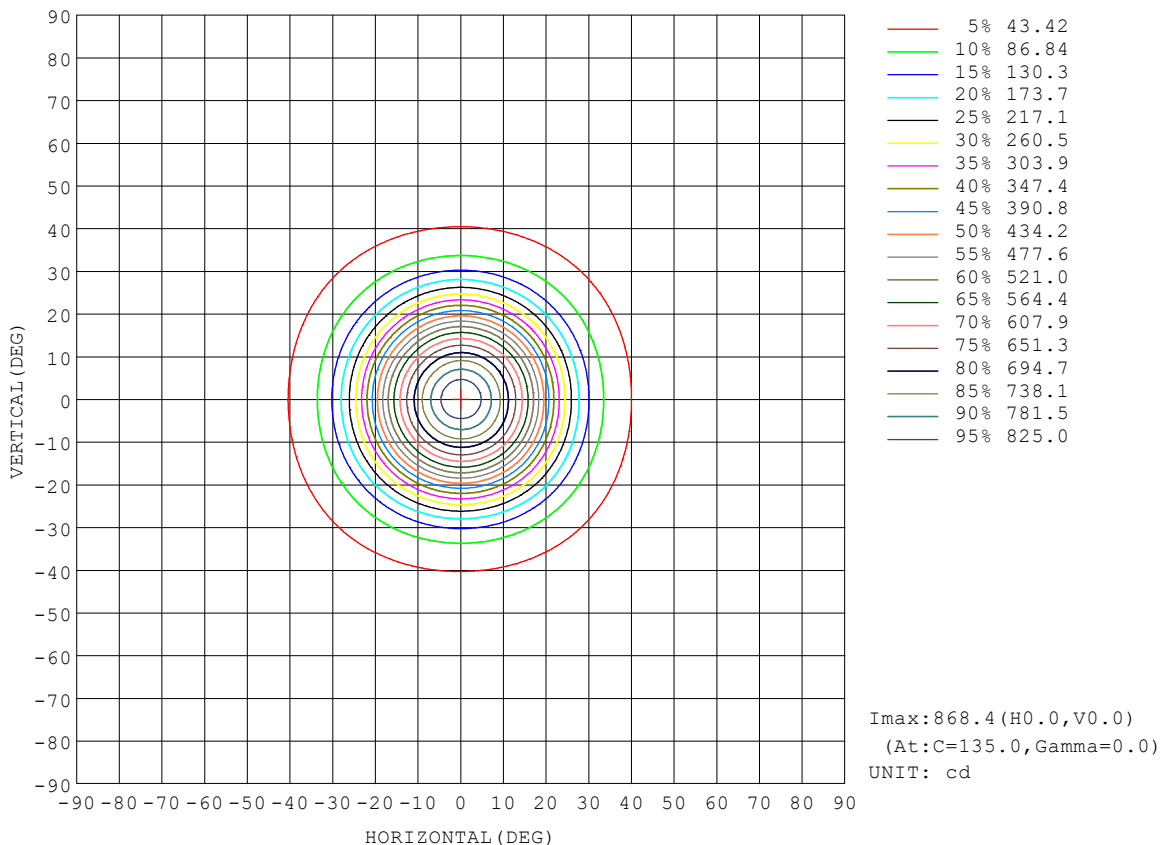


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

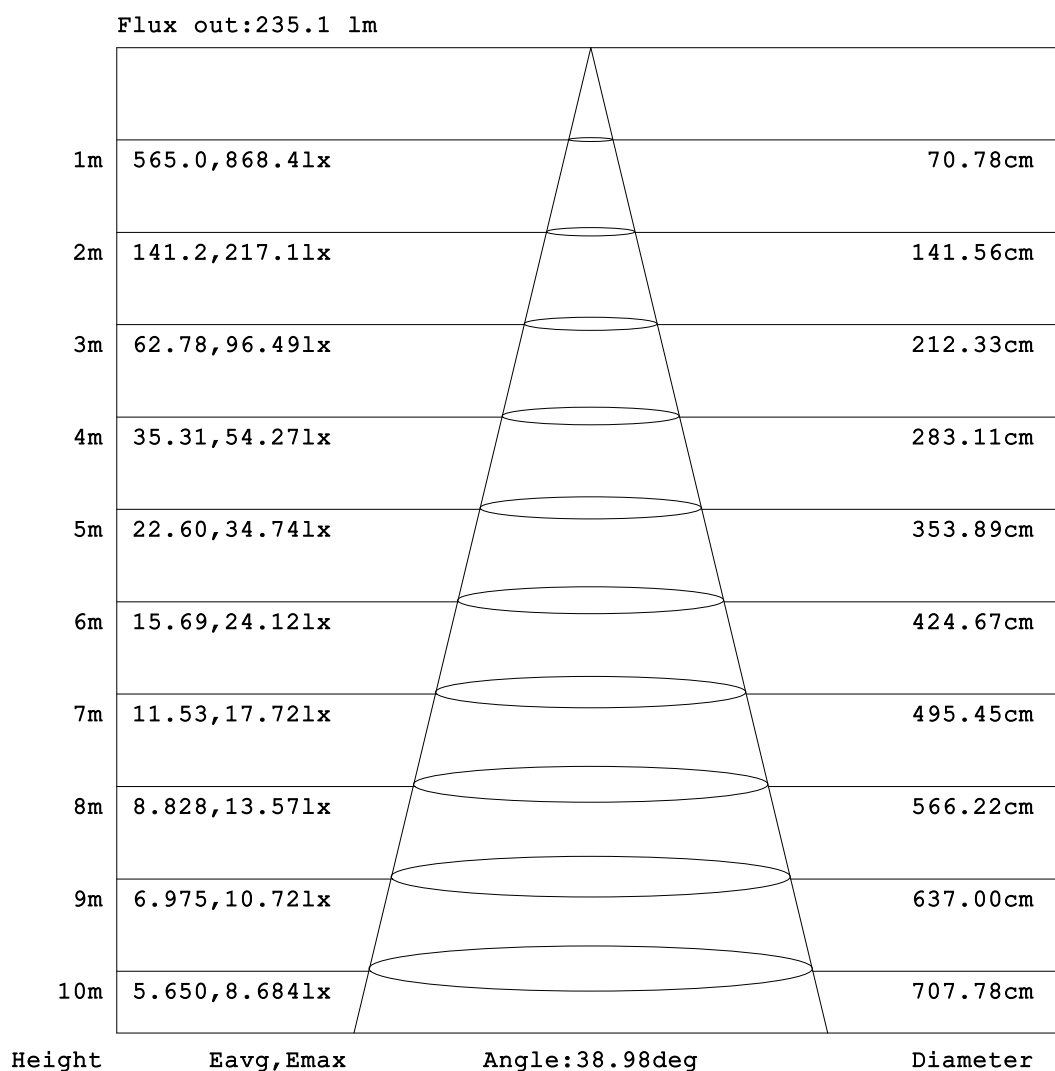


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

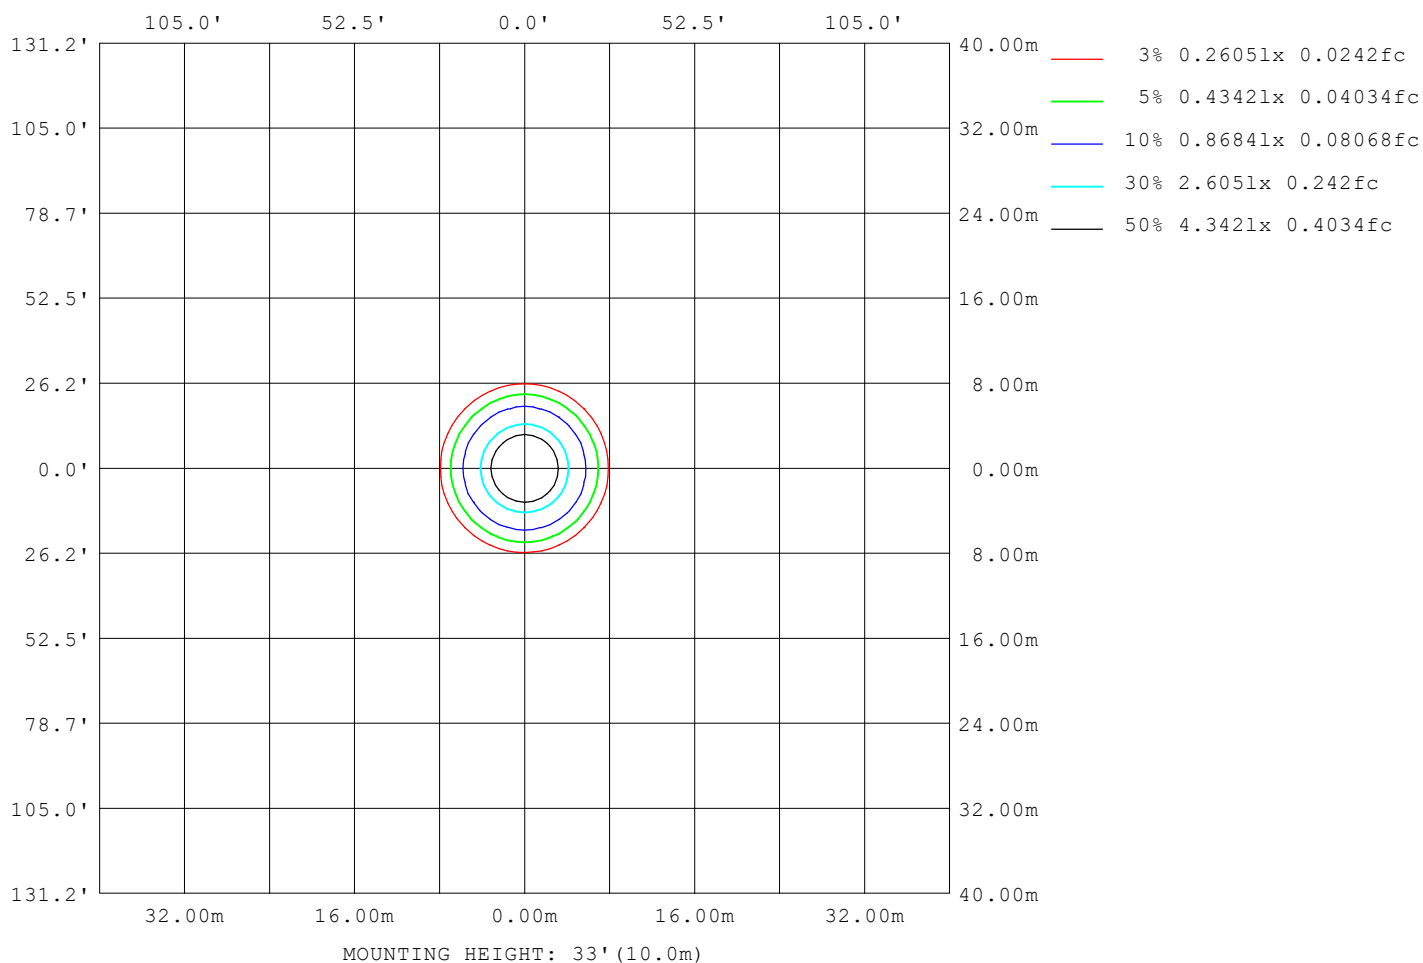

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Chen Songyu
Test Date: 2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	702
L_0~180 (75) av	777
L_0~180 (85) av	1579
L_90~270 (65) av	716
L_90~270 (75) av	784
L_90~270 (85) av	1542
L_45 (65) av	713
L_45 (75) av	809
L_45 (85) av	1612

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Chen Songyu
Test Date:2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.520m [K=1.0000]
Remarks:

Planar Illuminance Curve

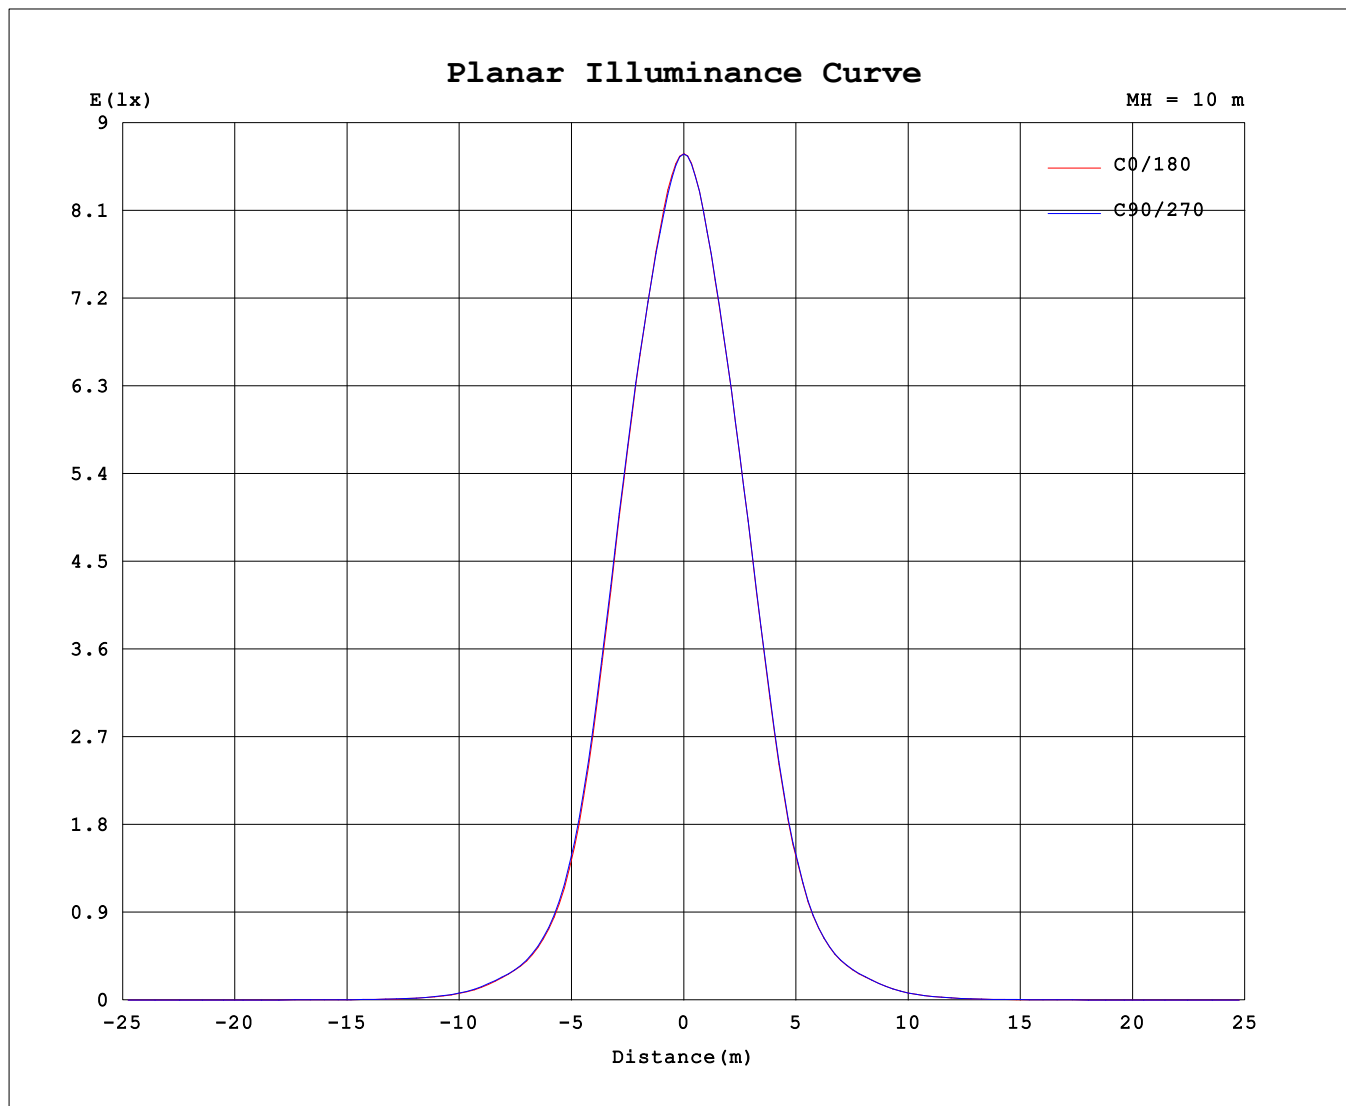

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Chen Songyu
Test Date: 2026-02-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.520m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.23V I:0.0231A P:4.4545W PF:0.8374 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:431.312x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 5W	Weight:
SPEC.: 4000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	868	868	868	868	868	868	868	868										
5	821	821	817	820	819	817	819	821										
10	722	728	723	720	716	712	717	721										
15	590	599	594	588	584	578	584	588										
20	415	426	423	420	416	411	419	416										
25	243	253	251	249	247	244	250	247										
30	131	136	135	134	133	131	134	132										
35	73.4	75.5	74.8	75.4	74.4	74.1	75.1	74.5										
40	43.6	45.0	45.3	46.0	45.6	45.2	45.8	44.5										
45	19.7	20.6	20.8	21.4	21.3	21.1	21.2	20.2										
50	8.07	8.34	8.34	8.75	8.76	8.75	8.80	8.33										
55	3.92	3.89	3.85	3.94	3.94	4.02	4.12	4.02										
60	2.83	2.80	2.72	2.74	2.74	2.79	2.93	2.91										
65	2.17	2.12	2.06	2.02	2.03	2.11	2.22	2.28										
70	1.75	1.70	1.63	1.58	1.60	1.70	1.79	1.90										
75	1.50	1.45	1.34	1.31	1.35	1.48	1.53	1.70										
80	1.25	1.18	1.06	1.02	1.07	1.20	1.23	1.42										
85	1.06	0.97	0.90	0.85	0.89	1.00	1.01	1.15										
90	0.85	0.79	0.75	0.69	0.72	0.82	0.82	0.91										
95	0.14	0.15	0.19	0.10	0.08	0.08	0.19	0.19										
100	0.07	0.12	0.26	0.12	0.07	0.08	0.33	0.08										
105	0.07	0.22	0.27	0.20	0.09	0.21	0.22	0.21										
110	0.13	0.21	0.37	0.22	0.15	0.22	0.33	0.22										
115	0.18	0.24	0.38	0.24	0.29	0.24	0.38	0.23										
120	0.28	0.31	0.39	0.30	0.41	0.31	0.44	0.31										
125	0.52	0.42	0.52	0.41	0.58	0.41	0.59	0.42										
130	0.76	0.65	0.75	0.66	0.83	0.69	0.79	0.69										
135	1.01	0.99	1.04	1.00	1.09	1.06	1.05	1.05										
140	1.35	1.40	1.43	1.40	1.45	1.47	1.46	1.47										
145	1.81	1.82	1.90	1.82	1.94	1.94	1.93	1.94										
150	2.45	2.29	2.37	2.29	2.52	2.37	2.40	2.38										
155	2.71	2.73	2.74	2.71	2.80	2.77	2.81	2.79										
160	3.03	3.09	3.07	3.06	3.10	3.07	3.12	3.12										
165	3.38	3.33	3.29	3.29	3.39	3.28	3.32	3.32										
170	3.42	3.38	3.37	3.34	3.38	3.32	3.38	3.36										
175	3.39	3.46	3.37	3.42	3.40	3.38	3.39	3.43										
180	3.43	3.45	3.41	3.44	3.42	3.44	3.42	3.44										

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Chen Songyu

Test Date:2026-02-08

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:9.520m [K=1.0000]

Remarks: