



## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1554	1562	1550	1547	1540	1526	1534	1549	0- 10	160.9	160.9	17.3,17.3
20	900.2	917.3	909.3	906.2	900.9	884.4	898.8	900.8	10- 20	344.6	505.5	54.3,54.3
30	290.2	293.2	289.7	293.7	294.0	282.1	286.9	290.3	20- 30	249.8	755.2	81.1,81.1
40	96.57	96.97	96.74	100.3	100.3	97.08	97.90	97.39	30- 40	106.7	861.9	92.6,92.6
50	17.61	17.97	17.96	18.92	19.12	18.79	18.83	18.04	40- 50	37.72	899.6	96.6,96.6
60	6.189	6.071	5.904	5.934	5.951	6.077	6.322	6.365	50- 60	8.615	908.2	97.6,97.6
70	3.811	3.717	3.512	3.464	3.508	3.673	3.880	4.145	60- 70	4.663	912.9	98.1,98.1
80	2.726	2.582	2.280	2.251	2.365	2.572	2.688	3.101	70- 80	3.315	916.2	98.4,98.4
90	1.830	1.741	1.592	1.519	1.596	1.751	1.781	1.948	80- 90	2.332	918.5	98.7,98.7
100	0.1358	0.2370	0.5341	0.2464	0.1360	0.1932	0.7361	0.1935	90-100	0.6512	919.2	98.7,98.7
110	0.3140	0.4398	0.8103	0.4455	0.3072	0.4767	0.8226	0.4744	100-110	0.4378	919.6	98.8,98.8
120	0.6466	0.6393	0.8587	0.6365	0.8816	0.6995	0.9353	0.7029	110-120	0.5912	920.2	98.9,98.9
130	1.679	1.378	1.640	1.395	1.779	1.500	1.663	1.513	120-130	0.9573	921.2	99,99
140	2.946	3.003	3.114	3.012	3.122	3.214	3.121	3.196	130-140	1.746	922.9	99.1,99.1
150	5.293	4.912	5.126	4.913	5.414	5.137	5.146	5.144	140-150	2.551	925.5	99.4,99.4
160	6.554	6.639	6.639	6.580	6.648	6.650	6.695	6.722	150-160	2.726	928.2	99.7,99.7
170	7.335	7.258	7.207	7.154	7.294	7.150	7.262	7.250	160-170	1.999	930.2	99.9,99.9
180	7.409	7.451	7.348	7.435	7.395	7.431	7.360	7.418	170-180	0.6966	930.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 887.54 lm

%lum = 95.3%

%lamp = 95.3%

Conical surface Flux(120deg): 908.22 lm

%lum = 97.6%


%lamp = 97.6%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:Chen Songyu  
 Test Date:2026-02-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
 Humidity:65.0%  
 Test Distance:9.520m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

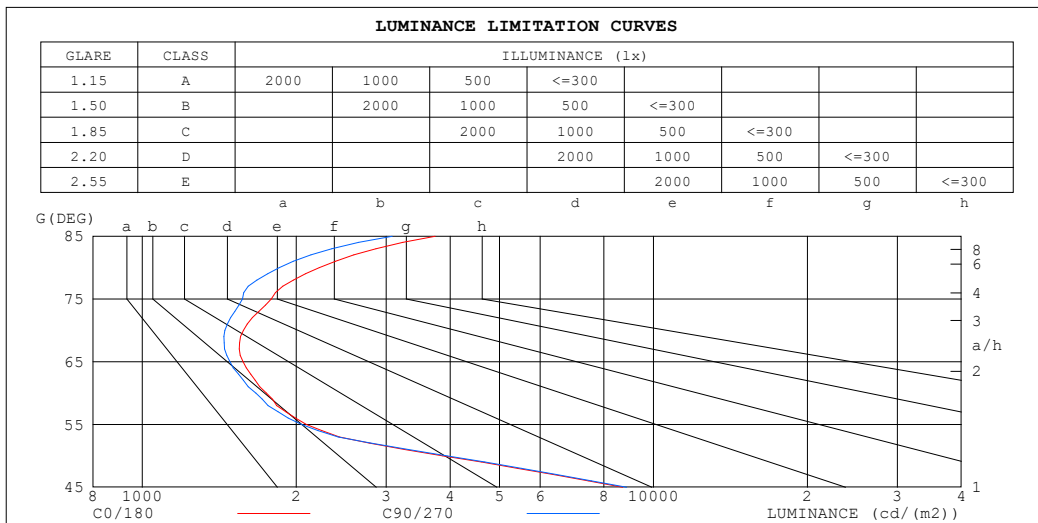

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3742	3084
80	2220	1854
75	1788	1569
70	1576	1450
65	1575	1484
60	1750	1667
55	2094	2051
50	3874	3945
45	8711	8854


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: Chen Songyu  
Test Date: 2026-02-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 9.520m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

pcc	80%			70%			50%			30%			10%			0
p <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.93	.91	.93	.91	.89	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.78	.74	.82	.77	.74	.81	.76	.73	.79	.75	.72	.78	.74	.72	.70
7.0	.79	.74	.70	.78	.73	.70	.77	.72	.69	.76	.72	.69	.74	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.73	.69	.66	.72	.68	.65	.71	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.63	.60	.67	.63	.60	.67	.62	.60	.66	.62	.59	.58

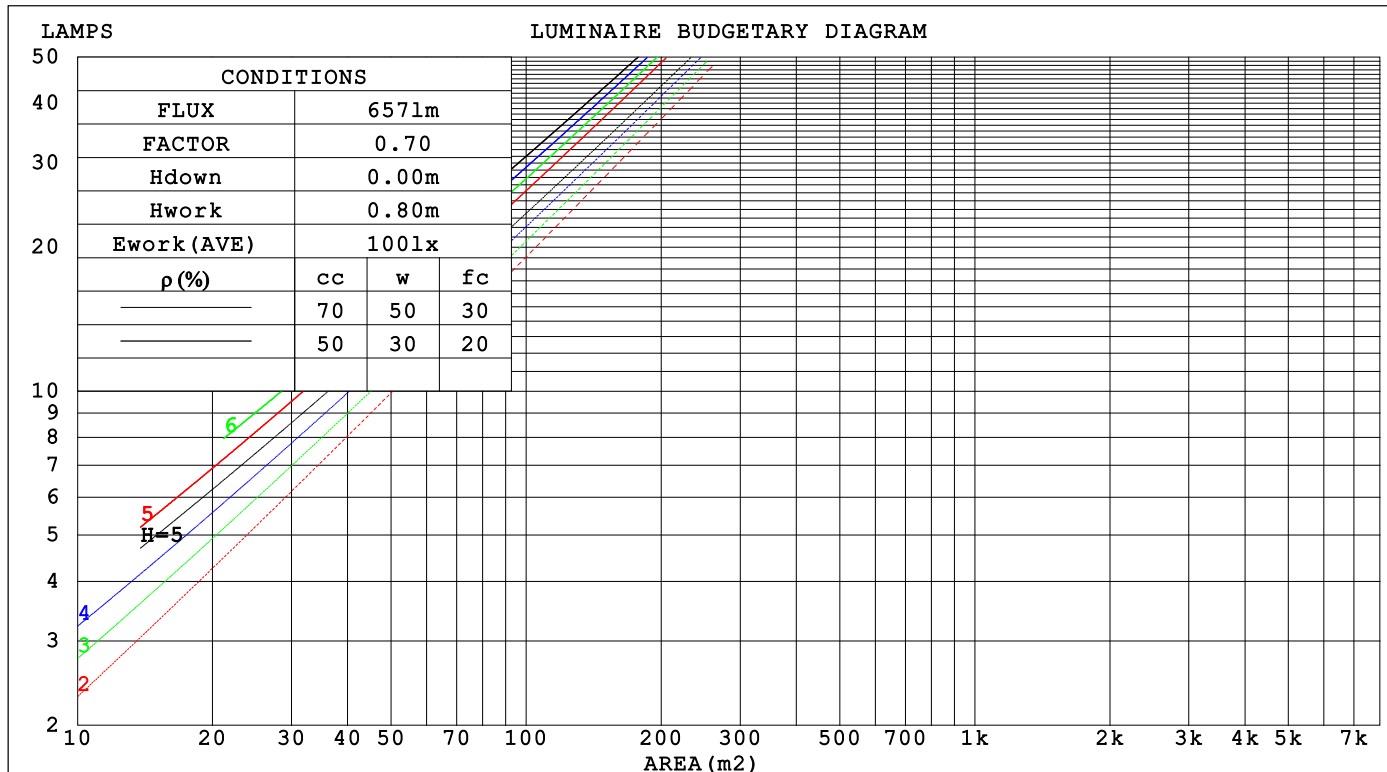

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Chen Songyu  
Test Date:2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:9.520m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D			WHType: 10W			Weight:		
SPEC.: 5000K			DIM.:			Instrument No.: HUP-IES-B3		
MFR.: CALEX			SUR.: 0.0475			shielding angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.168	.096	.030	.161	.092	.029	.148	.085	.027	.136	.078	.025	.124	.072	.023		
2.0	.158	.087	.027	.152	.084	.026	.141	.078	.024	.131	.073	.023	.121	.069	.022		
3.0	.149	.079	.024	.144	.077	.023	.135	.073	.022	.126	.069	.021	.118	.065	.020		
4.0	.141	.073	.022	.137	.072	.021	.128	.068	.020	.121	.065	.020	.114	.062	.019		
5.0	.134	.068	.020	.130	.067	.019	.123	.064	.019	.116	.061	.018	.110	.059	.018		
6.0	.127	.064	.018	.124	.063	.018	.118	.060	.018	.112	.058	.017	.106	.056	.017		
7.0	.121	.060	.017	.118	.059	.017	.113	.057	.016	.107	.055	.016	.103	.053	.016		
8.0	.116	.057	.016	.113	.056	.016	.108	.054	.015	.104	.052	.015	.099	.051	.015		
9.0	.111	.054	.015	.108	.053	.015	.104	.051	.015	.100	.050	.014	.096	.049	.014		
10.0	.106	.051	.014	.104	.050	.014	.100	.049	.014	.096	.048	.014	.093	.047	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.201	.201	.201	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021		
1.0	.181	.168	.156	.155	.144	.134	.106	.099	.093	.061	.057	.054	.019	.018	.017		
2.0	.165	.143	.124	.141	.123	.108	.097	.085	.075	.056	.049	.044	.018	.016	.014		
3.0	.152	.124	.102	.130	.107	.088	.089	.074	.062	.052	.043	.036	.017	.014	.012		
4.0	.141	.109	.085	.121	.094	.074	.083	.066	.052	.048	.038	.031	.015	.013	.010		
5.0	.131	.097	.072	.113	.084	.063	.078	.059	.044	.045	.034	.026	.014	.011	.009		
6.0	.123	.088	.062	.106	.076	.054	.073	.053	.038	.042	.031	.023	.014	.010	.008		
7.0	.117	.080	.054	.100	.069	.047	.069	.049	.034	.040	.029	.020	.013	.009	.007		
8.0	.111	.074	.048	.095	.064	.042	.066	.045	.030	.038	.026	.018	.012	.009	.006		
9.0	.105	.068	.043	.091	.059	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005		
10.0	.101	.064	.039	.087	.055	.034	.060	.039	.024	.035	.023	.014	.011	.008	.005		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Chen Songyu  
Test Date:2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:9.520m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm										
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D					WHType: 10W			Weight:		
SPEC.: 5000K					DIM.:			Instrument No.: HUP-IES-B3		
MFR.: CALEX					SUR.: 0.0475			shielding angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.7	14.6	14.0	14.7	14.9	13.7	14.5	13.9	14.7	14.9
3H	13.7	14.5	13.9	14.7	14.9	13.7	14.4	13.9	14.6	14.9
4H	13.7	14.4	14.0	14.7	14.9	13.6	14.4	13.9	14.6	14.9
6H	13.7	14.4	14.1	14.7	15.0	13.7	14.4	14.0	14.6	14.9
8H	13.8	14.5	14.1	14.7	15.0	13.7	14.4	14.0	14.6	14.9
12H	13.9	14.5	14.2	14.8	15.1	13.7	14.4	14.1	14.7	15.0
4H 2H	13.5	14.3	13.8	14.5	14.7	13.5	14.2	13.8	14.5	14.7
3H	13.5	14.2	13.9	14.5	14.8	13.5	14.1	13.8	14.4	14.7
4H	13.6	14.2	14.0	14.5	14.8	13.5	14.1	13.9	14.4	14.8
6H	13.7	14.3	14.1	14.6	15.0	13.6	14.1	14.0	14.5	14.9
8H	13.9	14.3	14.3	14.7	15.1	13.7	14.2	14.1	14.6	15.0
12H	14.0	14.5	14.5	14.9	15.3	13.8	14.3	14.3	14.7	15.1
8H 4H	13.5	14.0	14.0	14.4	14.8	13.5	14.0	13.9	14.3	14.7
6H	13.8	14.2	14.2	14.6	15.0	13.7	14.1	14.1	14.5	14.9
8H	14.0	14.3	14.5	14.8	15.2	13.8	14.2	14.3	14.6	15.1
12H	14.3	14.6	14.8	15.1	15.6	14.1	14.4	14.5	14.8	15.3
12H 4H	13.5	13.9	13.9	14.3	14.8	13.5	13.9	13.9	14.3	14.7
6H	13.8	14.1	14.2	14.6	15.0	13.7	14.0	14.1	14.5	14.9
8H	14.0	14.3	14.5	14.8	15.3	13.9	14.2	14.4	14.6	15.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.1 / - 3.7					+ 2.1 / - 4.0				
1.5H	+ 4.0 / - 3.8					+ 4.0 / - 4.1				
2.0H	+ 3.8 / - 1.2					+ 4.1 / - 1.5				

CIE Pub.117, 930.9 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.2)  
Area: 0.00708 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Chen Songyu  
Test Date:2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:9.520m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D			WHType: 10W			Weight:		
SPEC.: 5000K			DIM.:			Instrument No.: HUP-IES-B3		
MFR.: CALEX			SUR.: 0.0475			shielding angle:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	88	85	94	88	85	92	87	84	80
1.00	99	93	89	98	93	89	96	92	89	84
1.25	103	97	94	102	97	94	99	96	93	88
1.50	105	101	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	103	102	95
4.00	113	111	108	111	109	107	107	105	104	96
5.00	115	112	110	112	110	109	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: Chen Songyu  
Test Date: 2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 9.520m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

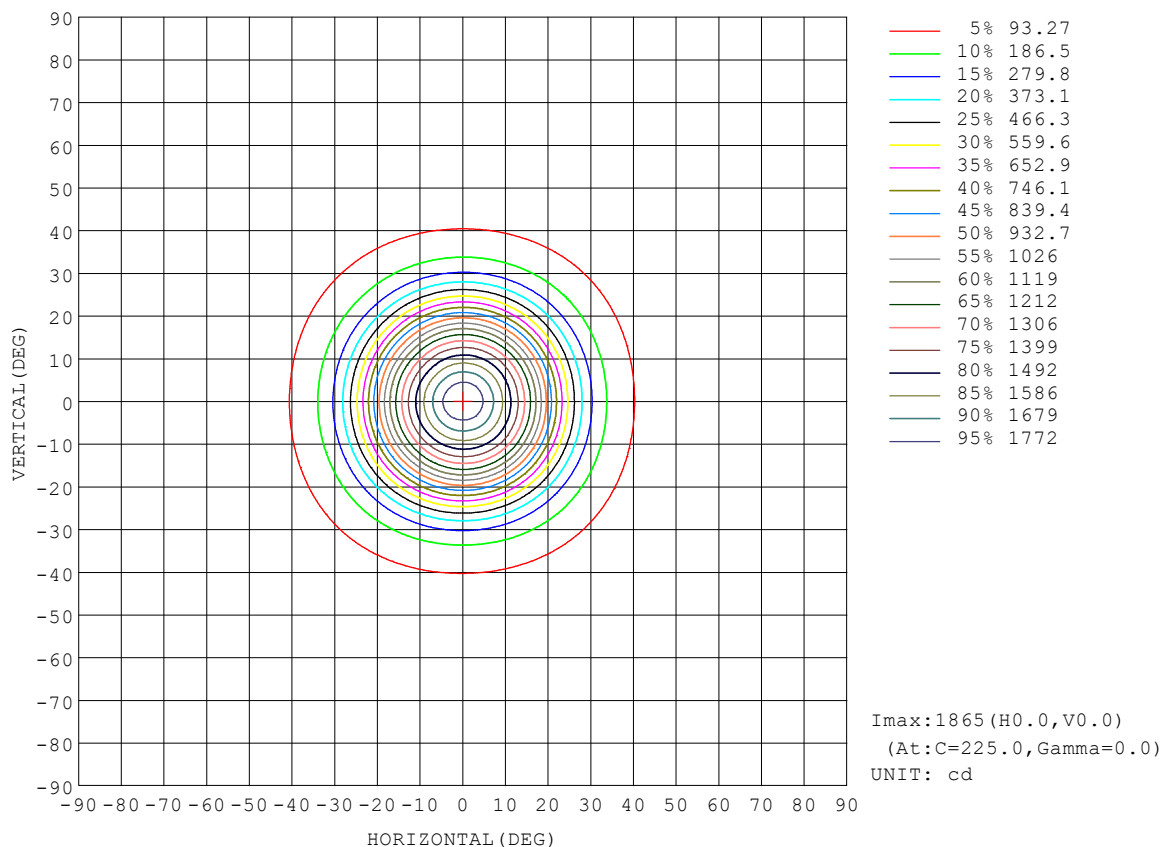


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Chen Songyu  
Test Date:2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:9.520m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

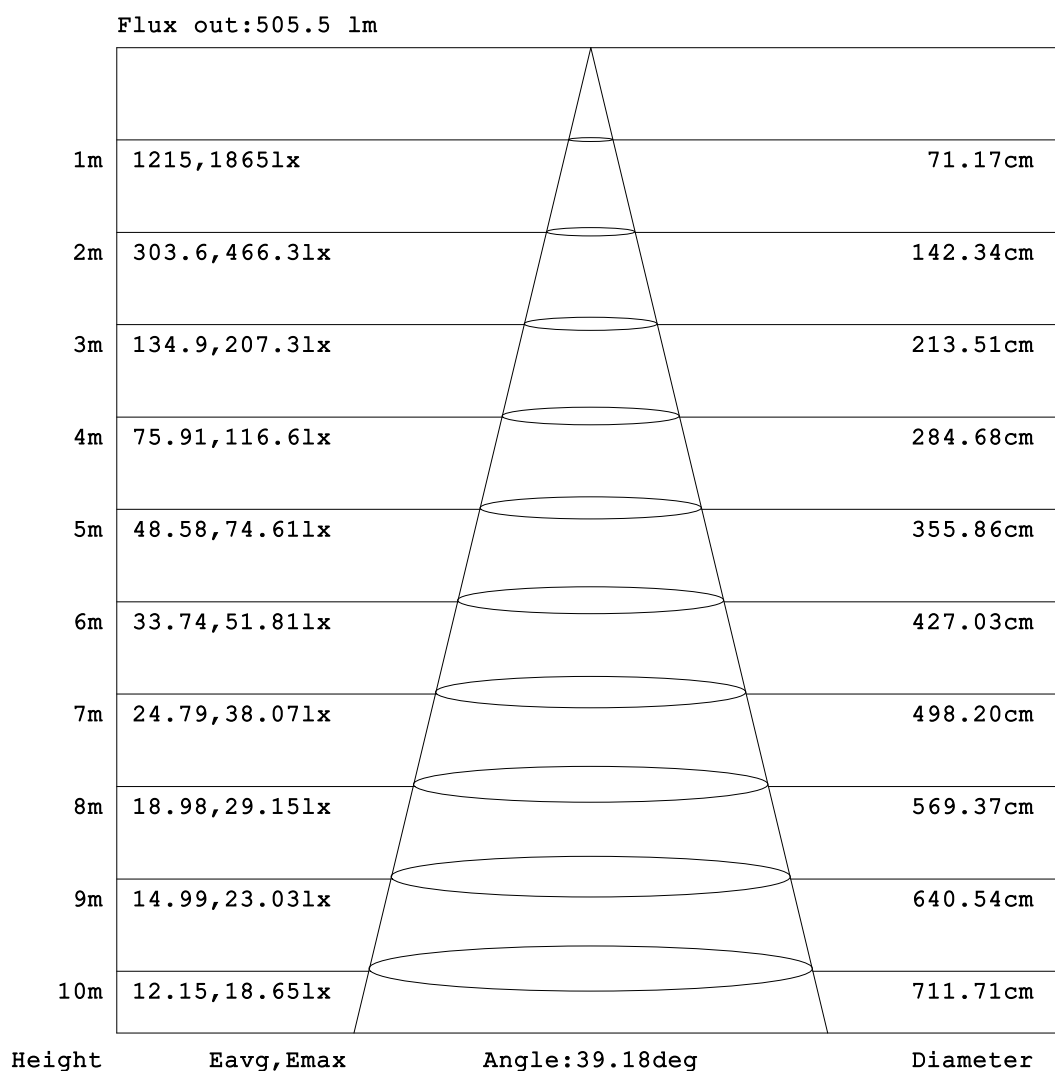


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: Chen Songyu  
Test Date: 2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 9.520m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

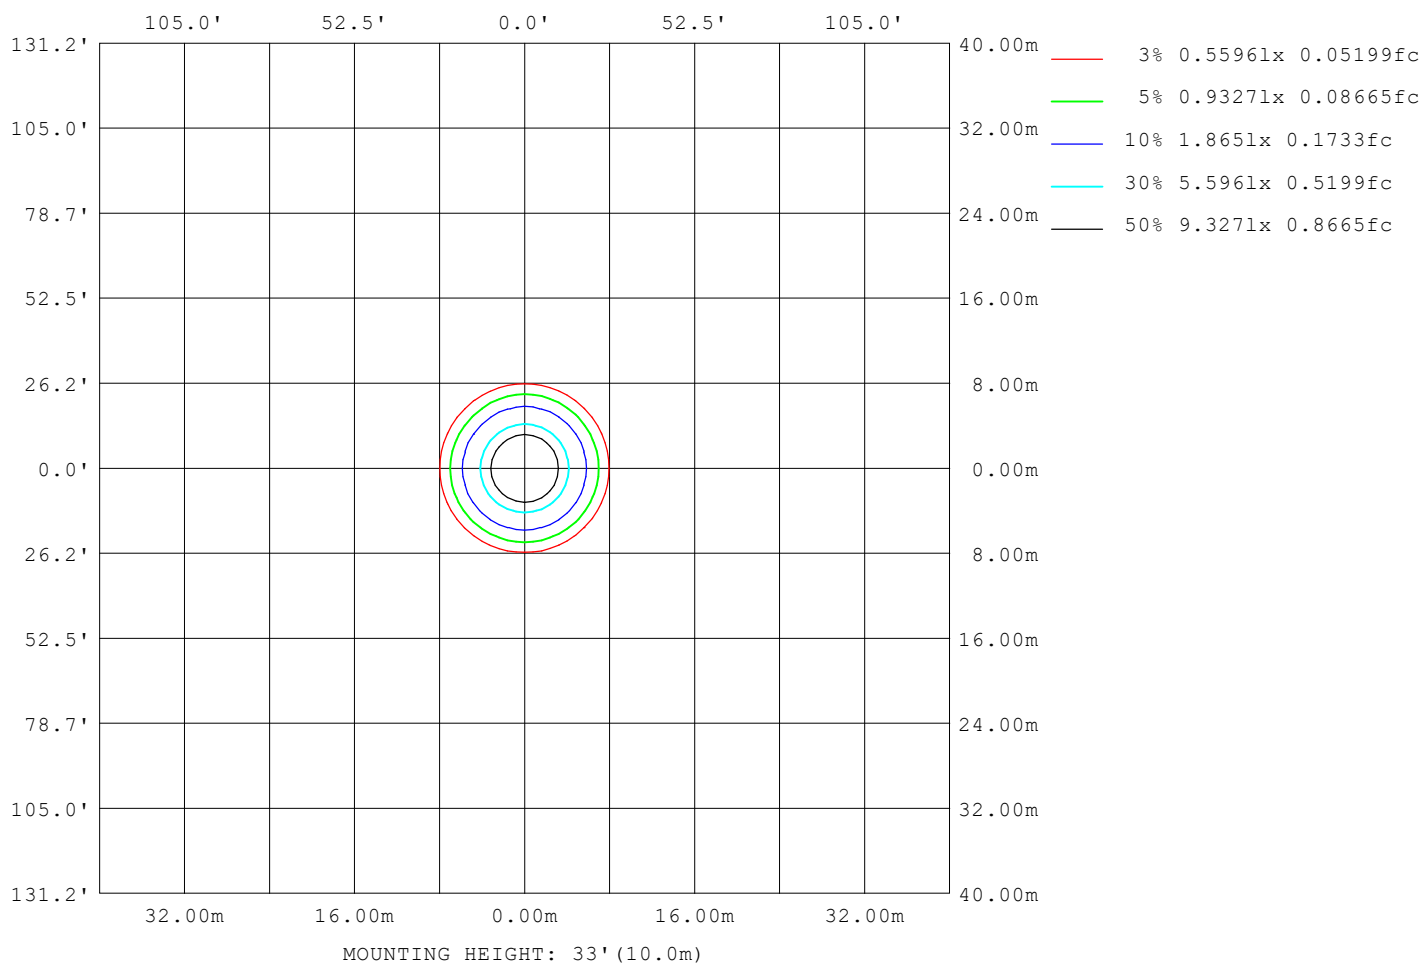

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: Chen Songyu  
Test Date: 2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 9.520m [K=1.0000]  
Remarks:

### LED Avg.L Report

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:


AvgL	cd/m2
L_0~180 (65) av	1530
L_0~180 (75) av	1705
L_0~180 (85) av	3473
L_90~270 (65) av	1549
L_90~270 (75) av	1696
L_90~270 (85) av	3325
L_45 (65) av	1550
L_45 (75) av	1764
L_45 (85) av	3514

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:Chen Songyu  
Test Date:2026-02-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:9.520m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

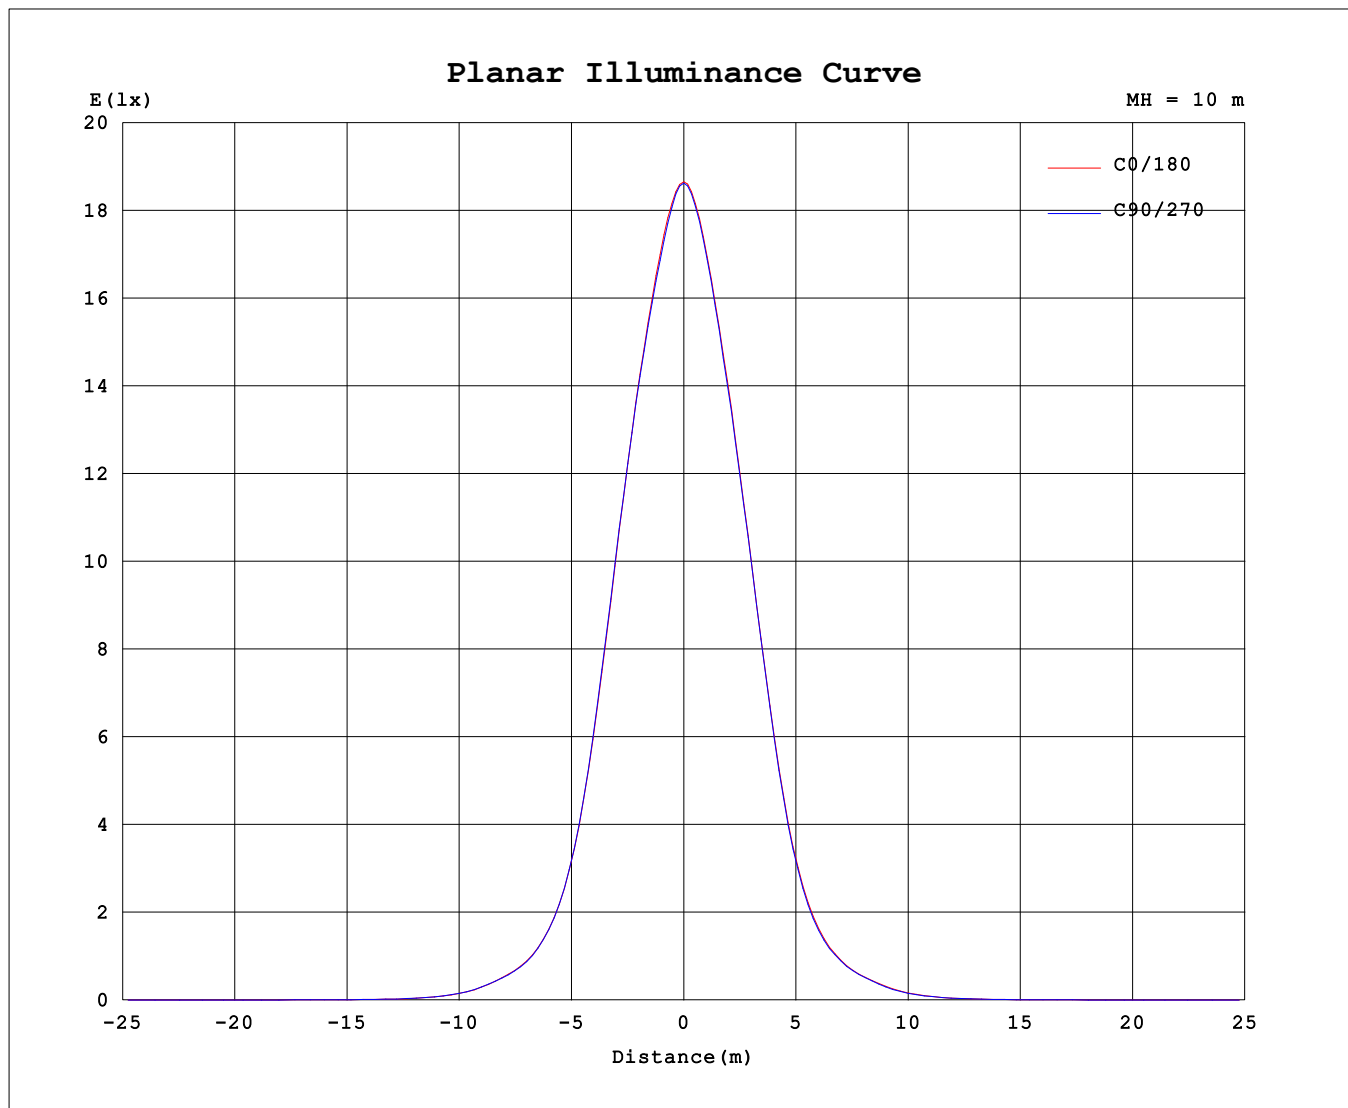

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: Chen Songyu  
 Test Date: 2026-02-08

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.00.456  
 Humidity: 65.0%  
 Test Distance: 9.520m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.25V I:0.0473A P:10.367W PF:0.9511 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:930.884x1 lm		
Name: Calex Luxor LX95 5-7-8-10W 3CT Triac dim 40D	WHType: 10W	Weight:
SPEC.: 5000K	DIM.:	Instrument No.: HUP-IES-B3
MFR.: CALEX	SUR.: 0.0475	shielding angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1863	1863	1863	1863	1863	1863	1863	1863										
5	1763	1761	1752	1757	1758	1749	1754	1762										
10	1554	1562	1550	1547	1540	1526	1534	1549										
15	1272	1289	1277	1264	1257	1240	1254	1267										
20	900	917	909	906	901	884	899	901										
25	534	545	539	544	542	525	535	540										
30	290	293	290	294	294	282	287	290										
35	162	166	160	167	167	159	164	163										
40	96.6	97.0	96.7	100	100	97.1	97.9	97.4										
45	43.6	44.4	44.3	46.4	46.7	45.3	45.2	44.0										
50	17.6	18.0	18.0	18.9	19.1	18.8	18.8	18.0										
55	8.49	8.48	8.33	8.55	8.59	8.69	8.96	8.76										
60	6.19	6.07	5.90	5.93	5.95	6.08	6.32	6.37										
65	4.71	4.63	4.44	4.42	4.45	4.55	4.82	4.95										
70	3.81	3.72	3.51	3.46	3.51	3.67	3.88	4.14										
75	3.27	3.17	2.88	2.88	2.97	3.17	3.34	3.70										
80	2.73	2.58	2.28	2.25	2.36	2.57	2.69	3.10										
85	2.31	2.14	1.90	1.85	1.98	2.17	2.20	2.51										
90	1.83	1.74	1.59	1.52	1.60	1.75	1.78	1.95										
95	0.28	0.34	0.39	0.23	0.19	0.19	0.39	0.39										
100	0.14	0.24	0.53	0.25	0.14	0.19	0.74	0.19										
105	0.17	0.46	0.59	0.47	0.19	0.51	0.45	0.50										
110	0.31	0.44	0.81	0.45	0.31	0.48	0.82	0.47										
115	0.41	0.50	0.79	0.50	0.61	0.51	0.81	0.50										
120	0.65	0.64	0.86	0.64	0.88	0.70	0.94	0.70										
125	1.15	0.88	1.14	0.88	1.23	0.90	1.24	0.91										
130	1.68	1.38	1.64	1.39	1.78	1.50	1.66	1.51										
135	2.24	2.12	2.26	2.15	2.36	2.32	2.20	2.31										
140	2.95	3.00	3.11	3.01	3.12	3.21	3.12	3.20										
145	3.93	3.90	4.11	3.92	4.16	4.20	4.14	4.20										
150	5.29	4.91	5.13	4.91	5.41	5.14	5.15	5.14										
155	5.85	5.86	5.91	5.83	6.01	5.98	6.04	6.02										
160	6.55	6.64	6.64	6.58	6.65	6.65	6.70	6.72										
165	7.29	7.16	7.10	7.06	7.27	7.07	7.12	7.17										
170	7.34	7.26	7.21	7.15	7.29	7.15	7.26	7.25										
175	7.33	7.45	7.27	7.36	7.34	7.32	7.32	7.41										
180	7.41	7.45	7.35	7.43	7.40	7.43	7.36	7.42										

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Chen Songyu

Test Date:2026-02-08

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:9.520m [K=1.0000]

Remarks: